

X690 Series

Highlights

Family of 10Gb/100Gb Switches with Advanced Enterprise Capabilities


- Full featured ExtremeXOS® operating system with advanced features supporting switching, routing, SDN, and VXLAN
- Controlling aggregation switch for V300 and V400 edge devices with Extreme's Extended Edge Switching
- High-density 10Gb aggregation and leaf applications
- Non-blocking 1.76 Tbps switching capacity per system

Ease of Use — Flexible Management Options

- ExtremeCloud IQ - Site Engine application support
- Advanced command line interface
- Zero Touch Provisioning (ZTP+)
- Integrated web based management application

Flexible System Configurations

- Wide range of port speeds from 1Gb, 10Gb, 25Gb, 40Gb, 50Gb, and 100Gb
- Fiber SFP+ and copper 10GBASE-T models
- Hot-swappable modular power and fans
- AC and DC power supply options
- Front to Back and Back to Front airflow options
- Redundancy options for high availability

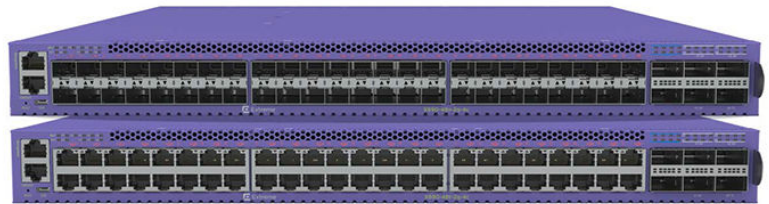

High-performance 48-port 10Gb aggregation and leaf switch

High-Density, 10Gb Enterprise LAN and Aggregation Switching

The X690 Series products are high-density, purpose-built 10Gb/100Gb switches designed for high-performance enterprise and aggregation applications. The X690 can support a range of interface speeds, including 1Gb, 10Gb, 25Gb, 40Gb, 50Gb, and 100Gb, all in a compact 1RU form factor. This enables the X690 to be flexibly deployed in either Enterprise LAN or high-density top of rack applications.

The X690 can also serve as the controlling aggregation switch within Extreme's Extended Edge Switching solution.

Two models of the X690 are available:

X690-48x-2q-4c

- 48 x 10Gb/10Gb SFP+ ports
- 2 x 10Gb/40Gb QSFP+ ports
- Up to 4 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports

X690-48t-2q-4c

- 48 x 100Mb/1Gb/10Gb 10GBASE-T ports
- 2 x 10Gb/40Gb QSFP+ ports
- Up to 4 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports

Flexible Deployment Options

The X690 can handle a range of high bandwidth applications, including high-density 10Gb top of rack aggregation, as well as spine/leaf deployments as an edge leaf switch. With both copper and fiber high-density 10Gb port options, the X690 can flexibly accommodate a variety of data center needs. It can also flexibly support uplinks at 25Gb, 40Gb, 50Gb or even 100Gb rates. A range of SFP+ and QSFP+ optical transceivers are available to support 1Gb, 10Gb and 40Gb Ethernet, while QSFP28 optical transceivers can be used to support 25Gb, 50Gb, and 100Gb Ethernet applications.

ExtremeXOS Intelligent L2/ L3 Switching

The X690 family supports sophisticated, intelligent Layer 2 switching, as well as Layer 3 IPv4/IPv6 routing, including policy-based switching and routing. The X690 simplifies network operation with the ExtremeXOS modular operating system, which is used across a wide range of Extreme's networking products. The high availability ExtremeXOS operating system reduces operational overhead through the use of a single OS across the network.

Extended Edge Switching

The X690 supports Extreme Extended Edge Switching, an innovative solution that simplifies the deployment and operation of edge switches. With this solution, the X690 can be meshed with economical V300 and V400 Series access devices to form a single logical switch. Advanced X690 services can then be seamlessly delivered to the V300 or V400 edge switches. The result is a simplified operational model that reduces costs.

High-Performance 400Gb Stacking

The X690 supports SummitStack-V400 400Gbps high speed stacking using 2 100Gb ports, along with other switches. Up to eight (8) X590, X690, and X870 systems can be stacked using SummitStack-V400. Any of the supported 100Gb QSFP28 direct attach cables can be used for the stacking links.

Comprehensive Network Management

Extreme Networks has developed tools that simplify and help in efficiently managing your network. The ExtremeCloud IQ - Site Engine application suite provides centralized visibility and granular control of enterprise network resources end to end.

Product Specifications

Model	X690-48x-2q-4c	X690-48t-2q-4c
Ports	<ul style="list-style-type: none"> • 48 x 1Gb/10Gb SFP+ ports • 2 x 10Gb/40Gb QSFP+ ports • 4 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports • 1 x Serial console port RJ-45 • 1 x 10/100/1000BASE-T out-of-band management port • Micro-USB Type A storage port QSFP Port Configurations Support <ul style="list-style-type: none"> • 4 x 10Gb/40Gb QSFP+ ports and 2 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports or <ul style="list-style-type: none"> • 4 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports (two QSFP ports inactive) 	<ul style="list-style-type: none"> • 48 x 100Mb/1Gb/10Gb 10GBASE-T ports • 2 x 10Gb/40Gb QSFP+ ports • 4 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports • 1 x Serial console port RJ-45 • 1 x 10/100/1000BASE-T out-of-band management port • Micro-USB Type A storage port QSFP Port Configurations Support <ul style="list-style-type: none"> • 4 x 10Gb/40Gb QSFP+ ports and 2 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports or <ul style="list-style-type: none"> • 4 x 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports (two QSFP ports inactive)
Power Supplies	<ul style="list-style-type: none"> • Modular 770W AC power supply (up to two PSUs) • Modular 1100W DC power supply (up to two PSUs) • Front-Back and Back-Front airflow options 	<ul style="list-style-type: none"> • Modular 770W AC power supply (up to two PSUs) • Modular 1100W DC power supply (up to two PSUs) • Front-Back and Back-Front airflow options
Fan Modules	6 fan modules Front-Back and Back-Front airflow options	6 fan modules Front-Back and Back-Front airflow options
Dimensions	17.4 in W / 19.2 in D / 1.7 in H (44.1 cm / 48.8 cm / 4.3 cm)	17.4 in W / 19.2 in D / 1.7 in H (44.1 cm / 48.8 cm / 4.3 cm)
Performance	<ul style="list-style-type: none"> • 1.76Tbps Switching Capacity • 759Mpps Forwarding Rate • Average Latency: 800 ns 	<ul style="list-style-type: none"> • 1.76Tbps Switching Capacity • 759Mpps Forwarding Rate • Average Latency: 2.3 μsec
CPU Memory	<ul style="list-style-type: none"> • 2.4GHz Quad core CPU • 8GB DDR3 ECC memory • 32GB SSD memory 	<ul style="list-style-type: none"> • 2.4GHz Quad core CPU • 8GB DDR3 ECC memory • 32GB SSD memory
Packet Buffers	12MB	12MB
Operating Conditions	<ul style="list-style-type: none"> • 0°C - 45°C operation • 10% to 95% relative humidity, non-condensing • 0 - 3000 meters altitude • Shock (half sine): 98 m/s² (10 G), 11 ms, 9 shocks • Random vibration: 3 to 500 Hz at 1.5G rms 	<ul style="list-style-type: none"> • 0°C - 45°C operation • 10% to 95% relative humidity, non-condensing • 0 - 3000 meters altitude • Shock (half sine): 98 m/s² (10 G), 11 ms, 9 shocks • Random vibration: 3 to 500 Hz at 1.5G rms

Scaling and Performance

- MAC Addresses: 272K
- IPv4 LPM Entries: 256K max w/ALPM
- IPv4 Hosts:
 - with min LPM IPv4 entries: 146K
 - with max LPM IPv4 entries: 3K
- IPv6 LPM (/64) Entries: 128K max w/ALPM
- IPv6 Hosts: 32K max
- IP Multicast Groups - 4K
- IP Multicast (s,v,g) entries - 130K max
- Flexible Universal Forwarding Tables (UFT)
- 4092 user-created VLAN/VMANs
- 9216 Byte Max Packet Size (Jumbo Frame)
- 8 queues per port
- 8k ingress rules
- 1K egress rules
- OnePolicy and Scaling
 - Up to 24,576 authenticated policy users per switch
 - Policy Profiles: 63
- Unique Permit/Deny Rules per switch: 1976
 - Default OnePolicy Profile
 - MAC Rules: 512
 - IPv4 Rules: 512
 - IPv6 Rules: 512
 - L2 Rules: 440
- Data Center Bridging
 - DCBx Data Center Bridging Exchange Protocol
 - Priority Flow Control (PFC)
 - Enhanced Transmission Selection (ETS)
- VxLAN Tunneling End Point (VTEP)
- Configurable Store and Forward and Cut Through forwarding modes
- IEEE 802.3 Media Access Standards
 - IEEE 802.3ba / 802.3bm 40GBASE-X and 100GBASE-X
 - IEEE 802.3ae 10GBASE-X
 - IEEE 802.3 10GBASE-T (up to 100m using Cat6a cabling or better)
 - 25Gb and 50Gb Ethernet implemented per 25G/50G Ethernet Consortium specification and IEEE 80 2.3 standard sFlow
 - SummitStack-V400 400Gb stacking (full duplex)
 - Stacking with up to 8 X590/X690/X870 systems
 - 2 x 10 0Gb port s for stacking

Minimum/Maximum Power Consumption and Heat Dissipation

Switch Model	Minimum Heat Dissipation (Idle, no ports linked) 1 PSU	Minimum Power Consumption (Idle, no ports linked)	Maximum Heat Dissipation (Fans high, all ports 100% traffic) 2 PSUs	Maximum Power Consumption (Fans high, all ports 100% traffic)
X690-48x-2q-4c AC	282 BTU/hr	83W	1124 BTU/hr	329W
X690-48x-2q-4c DC	311 BTU/hr	91W	1178 BTU/hr	345W
X690-48t-2q-4c AC	425 BTU/hr	125W	1271 BTU/hr	373W
X690-48t-2q-4c DC	421 BTU/hr	123W	1315 BTU/hr	385W

Power Supply Specifications

	770W AC PSU 10960/10961	1100W DC PSU 10962/10963
Dimensions	2.3 in W x 1.6 in H x 14.1 in D (5.9 cm x 4.1 cm x 35.9 cm)	2.3 in W x 1.6 in H x 14.1 in D (5.9 cm x 4.1 cm x 35.9 cm)
Weight	2.2 lb (1kg)	2.2 lb (1 kg)
Voltage Input Range	100 - 240 VAC +/- 10%	-48 VDC -15% +20%
Line Frequency Range	50Hz - 60Hz +/- 5%	N/A

	770W AC PSU 10960/10961	1100W DC PSU 10962/10963
PSU Input Socket	IEC 320 C14	Terminal Block
Power Cord Input Plug	IEC 320 C13	N/A
Operating Conditions	0°C - 45°C Operation	0°C - 45°C Operation

Fan and Acoustic Noise

Switch Model	Bystander Sound Pressure	Declared Sound Power
X690-48x-2q-4c (Front-Back Airflow)	55.4 dB(A) up to 30°C 61.3 dB(A) up to 40°C 76.8 dB(A) @ 45°C (max)	6.9 bels up to 30°C 7.5 bels up to 40°C 9.0 bels @ 45°C (max)
X690-48x-2q-4c (Back-Front Airflow)	56.9 dB(A) up to 30°C 63.3 dB(A) up to 40°C 77.4 dB(A) @ 45°C (max)	7.1 bels up to 30°C 7.7 bels up to 40°C 9.1 bels @ 45°C (max)
X690-48t-2q-4c (Front-Back Airflow)	58 dB(A) up to 25°C 72.8 dB(A) up to 35°C 76.3 dB(A) @ 45°C (max)	7.2 bels up to 25°C 8.7 bels up to 35°C 9.0 bels @ 45°C (max)
X690-48t-2q-4c (Back-Front Airflow)	59.1 dB(A) up to 25°C 72.5 dB(A) up to 35°C 77.5 dB(A) @ 45°C (max)	7.3 bels up to 25°C 8.7 bels up to 35°C 9.0 bels @ 45°C (max)

Environmental

Environmental Specifications

- EN/ETSI 300 019-2-1 v2.1.2 - Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) - Acoustic Noise ASTM D3580
Random Vibration Unpackaged 1.5 G

Environmental Compliance

- EU RoHS – 2011/65/EU
- EU WEEE – 2012/19/EU
- China RoHS – SJ/T 11363-2006
- Taiwan RoHS – CNS 15663(2013.7)

Packaging and Storage Specifications

- Temp: -40°C to 70°C (-40°F to 158°F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Packaged Shock (half sine): 180 m/s² (18 G), 6 ms, 600 shocks
- Packaged Vibration: 5 to 62 Hz at velocity 5 mm/s, 62 to 500 Hz at 0.2 G
- Packaged Random Vibration: 5 to 20 Hz at 1.0 ASD w/-3 dB/oct. from 20 to 200 Hz
- Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

Regulatory and Safety

North American ITE

- UL 60950-1 2nd edition A2:2014, Listed Device (U.S.)
- CSA 22.2 No. 60950-1 2nd edition 2014(Canada)
- Complies with FCC 21 CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)

European ITE EN

- 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013 2nd Ed.
- EN 60825-1:2007 / IEC 60825-1:2007 Class 1 (Lasers Safety)
- 2014 / 35/ EU Low Voltage Directive

International ITE

- CB Report & Certificate per IEC 60950-1 : 2005+A1:2009+A2:2013 + National Differences
- AS/NZS 60950-1 (Australia /New Zealand)

EMI/EMC Standards

North American EMC for ITE

- FCC CFR 47 part 15 Class A (USA)
- ICES-003 Class A (Canada)

European EMC Standards

- EN 55032:2015 Class A
- EN 55024:2010

- EN 61000-3-2:2014 (Harmonics)
- EN 61000-3-3 2013 (Flicker)
- EN 300 386 v1.6.1(EMC Telecommunications)
- 2014/30/EU EMC Directive

International EMC Certifications

- CISPR 32:2015, Class A (International Emissions)
- AS/NZS CISPR32:2015
- CISPR 24:2010 Class A (International Immunity)
- IEC 61000-4-2:2008/EN 61000-4-2:2009 Electrostatic Discharge, 8kV Contact, 15 kV Air, Criteria A
- IEC 61000-4-3:2010/EN 61000-4-3:2006 +A1:2008 +A2:2010 Radiated Immunity 10V/m, Criteria A

- IEC 61000-4-4:2012/EN 61000-4-4:2012 Transient Burst, 1kV, Criteria A
- IEC 61000-4-5:2014/EN 61000-4-5:2014 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria A
- IEC 61000-4-6:2013/EN 61000-4-6:2014 Conducted Immunity, 0.15-80 MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11:2004 Power Dips & Interruptions, >30%, 25 periods, Criteria C

Country Specific

- VCCI Class A (Japan Emissions)
- ACMA RCM (Australia Emissions)
- CCC Mark
- KCC Mark, EMC Approval (Korea)

Telecom Standards

- CE 2.0 Compliant

Ordering Information

X690 Systems

Part Number	Product Name	Product Description
17350	X690-48x-2q-4c	X690-48x-2q-4c Base unit, 48 1Gb/10Gb SFP+ ports, 2 10Gb/40Gb QSFP+ ports, 4 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports, unpopulated, ExtremeXOS Advanced Edge License, 2 unpopulated power supply slots, 6 unpopulated fan module slots
17360	X690-48t-2q-4c	X690-48t-2q-4c Base unit, 48 1Gb/10Gb 10GBASE-T ports, 2 10Gb/40Gb QSFP+ ports, 4 10Gb/25Gb/40Gb/50Gb/100Gb QSFP28 ports, unpopulated, ExtremeXOS Advanced Edge License, 2 unpopulated power supply slots, 6 unpopulated fan module slots
17115	Fan Module FB	Fan module, Front to Back airflow
17116	Fan Module BF	Fan module, Back to Front airflow
10960	770W AC PSU F-B	770W AC power supply, Front-to-Back airflow
10961	770W AC PSU B-F	770W AC power supply, Back-to-Front airflow
10962	1100W DC PSU F-B	1100W DC power supply, Front-to-Back airflow
10963	1100W DC PSU B-F	1100W DC power supply, Back-to-Front airflow
16777	Four Piece Rack Mount Kit, Spare	Spare Four Piece Rack Mount compatible with X690
10965	LRM/MACsec Adapter	LRM/MACsec Adapter, includes two host cables for host switch connection, and USB cable for optional power connection. Requires MACsec license on host switch
10966	5-unit Rack Mount Kit	Optional rack mount bracket for LRM/MACsec Adapter. Holds five units in 1RU

Fan module and power supplies must be ordered separately.

Air flow direction of the fan module and power supplies must be the same.

AC and DC power supplies cannot be mixed in a system.

Rack mount rails are included.

Firmware Licenses

Part Number	Product Name	Product Description
17131	Core License	ExtremeXOS X670/X690 Series Core License
17134	OpenFlow Feature Pack	ExtremeXOS X670/X690 OpenFlow Feature Pack
17133	MPLS Feature Pack	ExtremeXOS X670/X690 MPLS Feature Pack
17138	MACsec Feature Pack	MACsec Feature Pack for X690 series switches. Enables MACsec when used with LRM/MACsec Adapter (10965)

100Gb Optical Transceivers and Direct Attach Cables

Part Number	Product Name	Product Description
10401	100Gb QSFP28 SR4 MMF	100Gb, 100GBASE-SR4, 70m OM3 / 100m OM4 MMF, QSFP28, MPO (8 fiber)
10332	MPO to 4xLC OM4 MMF 5m	MPO to 4xLC OM4 MMF patch cord, 5m (for use with 10401 QSFP28 SR4 4x25Gb breakout)
10403	100Gb QSFP28 LR4 10km	100Gb, 100GBASE-LR4, 10km SMF, QSFP28, LC
10404	100Gb QSFP28 CWDM4	100Gb, CWDM4, 2km SMF, QSFP28, LC
10405	100Gb QSFP28 PSM4	100Gb, Parallel Single Mode PSM4, 2km SMF, QSFP28, MPO (8 fiber)
10406	100Gb QSFP28 SWDM4 100m	100Gb, QSFP28 SWDM 75m OM3 /100m OM4 MMF LC
10327	MPO to 4xLC Breakout Patch Cord, SM, 10m	MPO to 4xLC Breakout Patch Cord, SM, 10m (for use with 10405 100Gb QSFP28 PSM4 transceiver for 4x25Gb breakout)
10434	100Gb, AOC QSFP28 5m	100Gb, QSFP28-QSFP28 Active optical cable, 5m
10435	100Gb, AOC QSFP28 7m	100Gb, QSFP28-QSFP28 Active optical cable, 7m
10436	100Gb, AOC QSFP28 10m	100Gb, QSFP28-QSFP28 Active optical cable, 10m
10437	100Gb, AOC QSFP28 20m	100Gb, QSFP28-QSFP28 Active optical cable, 20m
10441	100Gb AOC QSFP28 x 4 SFP28 5m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 5m
10442	100Gb AOC QSFP28 x 4 SFP28 7m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 7m
10443	100Gb AOC QSFP28 x 4 SFP28 10m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 10m
10444	100Gb AOC QSFP28 x 4 SFP28 20m	100Gb, QSFP28- 4xSFP28 (4x25Gb) Active optical breakout cable, 20m
10410	100Gb, DAC QSFP28-QSFP28 0.5m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 0.5m
10411	100Gb, DAC QSFP28-QSFP28 1m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 1m
10412	100Gb, DAC QSFP28-QSFP28 2m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 2m
10413	100Gb, DAC QSFP28-QSFP28 3m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 3m
10414	100Gb, DAC QSFP28-QSFP28 5m	100Gb, QSFP28-QSFP28 Direct attach passive copper cable, 5m
10421	100Gb, DAC QSFP28-4xSFP28 1m	100Gb, QSFP28-4 x SFP28 (4x25Gb) Direct attach passive copper breakout, 1m
10423	100Gb, DAC QSFP28-4xSFP28 3m	100Gb, QSFP28-4 x SFP28 (4x25Gb) Direct attach passive copper breakout, 3m
10424*	100Gb, DAC QSFP28-4xSFP28 5m	100Gb, QSFP28-4 x SFP28 (4x25Gb) Direct attach passive copper breakout, 5m

* 10424 100Gb DAC passive copper DAC breakout cable can also be used for 40Gb to 4 x 10Gb speed breakout.

40Gb Optical Transceivers and Direct Attach Cables

Part Number	Product Name	Product Description
10426	100Gb, DAC QSFP28-2xQSFP28 1m	100Gb, QSFP28-2 x QSFP28 (2x50Gb) Direct attach passive copper breakout, 1m
10428	100Gb, DAC QSFP28-2xQSFP28 3m	100Gb, QSFP28-2 x QSFP28 (2x50Gb) Direct attach passive copper breakout, 3m
10319	QSFP+ SR4 module	40Gb QSFP+ SR4 optical module, MPO connector (8 fiber), 100m MMF OM3, 140m MMF OM4
40GB-ESR4-QSFP	QSFP+ ESR4	40GB QSFP+ Extended Reach SR4, MMF, 300m OM3, 400m OM4 MMF
9380014-5M	MPO to 4xLC OM3 MMF	MPO to 4xLC OM3 MMF patch cord, 5m (for use with parallel MMF 4x10Gb breakout)
10332	MPO to 4xLC OM4 MMF 5m	MPO to 4xLC OM4 MMF patch cord, 5m (for use with parallel MMF 4x10Gb breakout)
10320	QSFP+ LR4	40Gb QSFP+ LR4 optical module, LC, 10km SMF
10326	QSFP+ PSM Optical Module	40Gb QSFP+ Parallel Single Mode (PSM) LR4, MPO connector (8 fiber), SMF, 10km
10327	MPO to 4xLC Breakout Patch Cord, SM, 10m	MPO to 4xLC Breakout Patch Cord, SM, 10m (for use with 10326 40Gb QSFP+ PSM transceiver for 4x10Gb breakout)
10329	40Gb BiDi MMF QSFP+	40Gb Bidirectional MMF, 100m OM3, QSFP+, duplex LC
10334	40Gb LM4 QSFP+	40Gb QSFP+ LM4, 140m OM3 MMF, 1km SMF, QSFP+, LC
10335	40Gb ER4 QSFP+	40Gb QSFP+ ER4, 40km SMF, QSFP+, LC
10311	QSFP+ passive copper cable, 0.5M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 0.5m length
10312	QSFP+ passive copper cable, 1.0M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 1m length
10313	QSFP+ passive copper cable, 3.0M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 3m length
10323	QSFP+ passive copper cable, 5.0M	40 Gigabit Ethernet QSFP+ passive copper cable assembly, 5m length
10336	3m QSFP+ Active Optical Cable	40 Gigabit QSFP+ active optical cable, 3m
10337	5m QSFP+ Active Optical Cable	40 Gigabit QSFP+ active optical cable, 5m
10315	10m QSFP+ Active Optical Cable	40 Gigabit Ethernet QSFP+ active optical cable assembly, 10m length
10316	20m QSFP+ Active Optical Cable	40 Gigabit Ethernet QSFP+ active optical cable assembly, 20m length
10318	100m QSFP+ Active Optical Cable	40 Gigabit Ethernet QSFP+ active optical cable assembly, 100m length
10202	QSFP+ - 4xSFP+ fan-out cbl, 1m	QSFP+ to 4 x SFP+ fan-out copper cable, 1m
10203	QSFP+ - 4xSFP+ fan-out cbl, 2m	QSFP+ to 4 x SFP+ fan-out copper cable, 2m
10321	QSFP+ - 4xSFP+ fan-out cbl, 3m	QSFP+ to 4 x SFP+ fan-out copper cable, 3m
QSFP-SFPP-ADPT	QSFP+ to SFP+ Adapter	QSFP+ to SFP+ adapter, supports a single SFP+ 10Gb Ethernet transceiver in a QSFP+ port (optical transceivers only, 10303 LRM and 10338 10GBASE-T not supported)

10Gb Transceivers and Direct Attach Cables

Part Number	Product Name	Product Description
10301	SR SFP+ module	10GBASE-SR SFP+, 850nm, LC, 300m OM3 MMF, 400m OM4 MMF
10302	LR SFP+ module	10GBASE-LR SFP+, 1310nm, LC, 10km SMF

Part Number	Product Name	Product Description
10309	10GBASE-ER SFP+	10GBASE-ER SFP+, 1550nm, LC connector, transmission length of up to 40km on SMF
10310	10GBASE-ZR SFP+	10Gb, 10GBASE-ZR, SMF, 1550nm, up to 80Km, LC SFP+
10325	10Gb SFP+ DWDM Tunable	10Gb DWDM Tunable, 80km SMF, LC SFP+
10GB-BX10-U	10 GB, SINGLE FIBER SM, -U 10 KM	10Gb, Single Fiber SM, Bidirectional, 1270nm Tx / 1330nm RX, 10Km, Simplex LC SFP+ (must be paired with 10GB-BX10-D)
10GB-BX10-D	10 GB, SINGLE FIBER SM, -D 10 KM	10Gb, Single Fiber SM, Bidirectional, 1330nm Tx / 1270nm RX, 10Km, Simplex LC SFP+ (must be paired with 10GB-BX10-U)
10GB-BX40-U	10 GB, SINGLE FIBER SM, -U 40 KM	10Gb, Single Fiber SM, Bidirectional, 1330nm Tx / 1330nm RX, 40Km, Simplex LC SFP+ (must be paired with 10GB-BX40-D)
10GB-BX40-D	10 GB, SINGLE FIBER SM, -D 40 KM	10Gb, Single Fiber SM, Bidirectional, 1270nm Tx / 1270nm RX, 40Km, Simplex LC SFP+ (must be paired with 10GB-BX40-U)
10338**	10Gb SFP+ 10GBASE-T	10Gb SFP+, 10GBASE-T RJ45, 30m with Cat6a
10GB-F10-SFPP	10 GB, ACTIVE OPTICAL DAC, 10 M	10Gb, Active optical direct attach cable with 2 integrated SFP+ transceivers, 10m
10GB-F20-SFPP	10 GB, ACTIVE OPTICAL DAC, 20 M	10Gb, Active optical direct attach cable with 2 integrated SFP+ transceivers, 20m
10304	10GBASE-CR SFP+ 1m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 1m
10305	10GBASE-CR SFP+ 3m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 3m
10306	10GBASE-CR SFP+ 5m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 5m
10307***	10GBASE-CR SFP+ 10m	10GBASE-CR SFP+ pre-terminated twin-ax copper cable with link lengths of 10m

** 10338 supported in X690-48x-2q-4c model with configuration of every other SFP+ port in system, up to a maximum of half the 10Gb SFP+ ports configured with 10GBASE-T transceivers. An adjacent SFP+ port should remain unused for every 10GBASE-T SFP+ installed.

*** 10307 supported only in ports 1-8 of X690-48x-2q-4c model.

1Gb Transceivers

Part Number	Product Name	Product Description
10051H	1000BASE-SX SFP, Hi	1000BASE-SX SFP, MMF 220 & 550 meters, LC connector, Industrial Temp
10052H	1000BASE-LX SFP, Hi	1000BASE-LX SFP, MMF 220 & 550 meters, SMF 10km, LC connector, Industrial Temp
10053H	1000BASE-ZX SFP, Hi	1000BASE-ZX SFP, SMF 70km, LC connector, Industrial Temp
10056H	1000BASE-BX-D BiDi SFP, Hi	1000BASE-BX-D SFP SMF single fiber, 1490-nm TX/1310-nm RX wavelength, 10Km, simplex LC Industrial Temp
10057H	1000BASE-BX-U BiDi SFP, Hi	1000BASE-BX-U SFP SMF single fiber, 1310-nm TX/1490-nm RX wavelength, 10Km, simplex LC Industrial Temp
MGBIC-BX40-U	1000BASE-BX-U BiDi SFP 40Km	1000BASE-BX-U SFP, single fiber, 1310-nm TX/1490-nm RX wavelength, 40Km Industrial Temp
MGBIC-BX40-D	1000BASE-BX-D BiDi SFP 40Km	1000BASE-BX-D SFP, single fiber, 1490-nm TX/1310-nm RX wavelength, 40Km Industrial Temp
MGBIC-BX120-U	1000BASE-BX-U BiDi SFP 120Km	1000BASE-BX-U SFP, single fiber, 1490-nm TX/1590-nm RX wavelength, 120Km Industrial Temp

Part Number	Product Name	Product Description
MGBIC-BX120-D	1000BASE-BX-D BiDi SFP 120Km	1000BASE-BX-U SFP, single fiber, 1590-nm TX/1490-nm RX wavelength, 120Km Industrial Temp
I-MGBIC-LC03	1000BASE-LX MMF SFP	1000BASE-LX SFP MMF, 1310nm, 2km with 62.5 micron OM1 MMF, 1km on 50 micron OM2 MMF, LC
MGBIC-02	1000BASE-T, RJ45 SFP	1000BASE-T SFP, RJ45, 100m Cat5e

Warranty

One-year hardware warranty. For warranty details, visit <https://www.extremenetworks.com/support/policies/>.

Power Cords

In support of the Extreme Networks Green initiatives, power cords can be ordered separately, but need to be specified at time of ordering.

Optics/Transceivers

For the latest and most up-to-date list of the optics/transceivers supported on this platform, refer to our [Extreme Optics Compatibility Tool](#).

Maintenance Services

Extreme's maintenance and support services with 100% in-sourced engineering experts and over 90% first-person resolution ensure efficient operations of your business- essential network. 24x7x365 phone support, advanced part replacement, and on-site support augment your staff with experienced resources that help you mitigate critical network issues fast. Visit [Extreme Maintenance Services](#) for more information.



©2023 Extreme Networks, Inc. All rights reserved. Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries. All other names are the property of their respective owners. For additional information on Extreme Networks Trademarks please see <http://www.extremenetworks.com/company/legal/trademarks>. Specifications and product availability are subject to change without notice. 16aug23