


# Extreme 7520

## ハイライト

- リーフ、スパイン、アグリゲーション、コアアプリケーション向けの高性能固定フォームスイッチ
- ユニバーサルデュアルペルソナハードウェアにより、ユーザーがOSを選択可能
- ExtremeCloud™ IQおよびExtremeCloud IQ - Site Engineで、パワフルでセキュア、かつ使いやすいクラウドベースのネットワーク管理を実現
- Fabric Connectによるネットワーク運用の自動化、ネットワークプロビジョニングの簡素化、セキュリティの強化

## ハードウェアの特徴

- 固定1Uフォームファクターで、MACsec非対応の2モデルとMACsec対応の1モデルの計3モデル
- ACおよびDC電源オプション
- 背面から前面および前面から背面へのエアフローオプション
- 最大8台までスタッキング可能
- 統合アプリケーションホスティングにより、スイッチのパフォーマンスに影響を与えることなくサードパーティ製アプリケーションを利用可能
- ノンブロッキング・ワイヤスピード設計

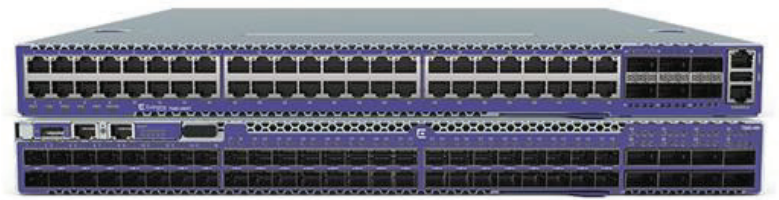

## ユニバーサルアグリゲーション/コアスイッチプラットフォーム

Extreme 7520は、高性能なアグリゲーションおよびコアアプリケーション向けに設計された48ポート10Gbおよび48ポート25Gbの専用スイッチです。7520はユニバーサルハードウェアプラットフォームとして、高度なポリシー機能に加え、エンドツーエンドのセキュアなネットワークセグメンテーションを提供します。これにより、7520は、さまざまなアグリゲーションおよびコア環境に導入可能な、他に類を見ない柔軟なプラットフォームとなっています。

さまざまなアプリケーションや東西のトラフィックパターンに対応するネットワークの設計を可能にし、また、高密度なスケールアウトアーキテクチャ、優れた電力効率、エアフローオプションを備えているため、ネットワークオペレーティングセンターの場所を問わず、電力、冷却、機器室のスペースを最適化するコスト効率の高いソリューションを提供します。

7520には3つのモデルがあります。

### 7520-48XT-6C

48 x 1Gb/10Gb 10GBaseT メタルポート (MACsec非対応)  
6 x 40Gb/100Gb QSFP28 ファイバーポート (MACsec非対応)

### 7520-48Y-8C

48 x 1Gb/10Gb/25Gb SFP28 ファイバーポート (MACsec非対応)  
8 x 40Gb/100Gb QSFP28 ファイバーポート (MACsec非対応)

### 7520-48YE-8CE

48 x 10/25Gb SFP28 ファイバーポート (MACsec 対応)  
8 x 100Gb QSFP28 ファイバーポート (MACsec 対応)

注：このモデルはスタッキングをサポートしていません。

## ユニバーサルハードウェアプラットフォーム

7520 シリーズには、スイッチオペレーティングシステム (OS) をユーザーが選択できるデュアルペルソナ機能が搭載されています。7520 ハードウェアモデルでは、Switch Engine (EXOS) またはFabric Engine (VOSS) のいずれかのペルソナを有効にできます。希望するペルソナを起動時に選択することも、後で変更することもできます。一度選択すると、7520 は選択されたOSの機能と性能を引き継ぎます。

7520ペルソナのアクティベーションは、システムCLI経由など、起動時に手動で行うことができます。または、ExtremeCloud IQで7520ペルソナを事前にプロビジョニングすることで自動化することもできます。最初に起動すると、7520は自動的にExtremeCloud IQに接続してペルソナを検索します。その後、事前にプロビジョニングされたOSペルソナが7520システム上でリモートから有効になり、手動で選択する必要がなくなります。

## イーサネット・ファブリック・サービス

7520は、Fabric Engine (VOSS) 実行時にはExtreme NetworksのFabric Connectを、Switch Engine (EXOS) 実行時にはExtreme のIP Fabricを含む、さまざまなイーサネットファブリックサービスをサポートします。また、レイヤ2またはレイヤ3のファブリックサービスに自動接続するFabric Attachもサポートしています。7520に搭載されたExtreme NetworksのFabric ConnectとIP Fabricは、ネットワーク運用の自動化、ネットワークプロビジョニングの簡素化、セキュリティの強化を実現する仮想化ネットワークの構築を可能にするとともに、ネットワーク担当者やIT担当者の負担を軽減します。

## 高性能スタッキング

7520のQSFP28アップリンクポートのうち2ポートはSwitch Engine (EXOS) 実行時に高速400Gbスタッキングに使用できます。メーカー認定のダイレクトアタッチ・ケーブルや光トランシーバを使用して、最大8台のスイッチをスタックできます (注: スタッキングは、7520-48YE-8CEモデルまたはFabric Engine (VOSS) 実行時にはサポートされません)。

## マネジメント

7520は、ExtremeCloud IQおよびExtremeCloud IQ - Site Engineで管理することができ、有線/無線ネットワーク全体のユーザー、デバイス、アプリケーションを統合して表示できる包括的な統合管理を実現します。

ExtremeCloud IQは、ゼロタッチプロビジョニングを可能にし、OSペルソナの選択だけでなく、新しい7520スイッチを迅速にオンラインにすることができます。また、7520のオンボックス管理は、ウェブベースのGUIまたは汎用コマンドラインインターフェイス (CLI) を使用して手動で行うこともできます。

## Switch Specifications

Model	7520-48Y-8C 7520-48YE-8CE	7520-48XT-6C
Ports	<ul style="list-style-type: none"> <li>48 x 1/10/25GbE SFP28 ports (48Y/8C)</li> <li>48 x 10/25GbE SFP28 ports (48YE-8CE)</li> <li>8 x 40/100GbE QSFP28 ports</li> <li>1 x Serial console port RJ-45</li> <li>1 x 10/100/1000BASE-T out-of-band management port</li> <li>USB Type A storage port</li> </ul>	<ul style="list-style-type: none"> <li>48 x 1/10GbE 10GBaseT ports</li> <li>6 x 40/100GbE QSFP28 ports</li> <li>1 x Serial console port RJ-45</li> <li>1 x 10/100/1000BASE-T out-of-band management port</li> <li>USB Type A storage port</li> </ul>
Power Supplies	<ul style="list-style-type: none"> <li>Modular 800W AC power supply (up to two PSUs)</li> <li>Modular 800W DC power supply (up to two PSUs)</li> <li>Front to Back and Back to Front airflow option</li> </ul>	<ul style="list-style-type: none"> <li>Modular 800W AC power supply (up to two PSUs)</li> <li>Modular 800W DC power supply (up to two PSUs)</li> <li>Front to Back and Back to Front airflow options</li> </ul>
Fan Modules	<ul style="list-style-type: none"> <li>6 fan modules</li> <li>Front-Back and Back-Front airflow options</li> </ul>	<ul style="list-style-type: none"> <li>6 fan modules</li> <li>Front-Back and Back-Front airflow options</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>17.3in W/21.24in D/1.7in H (44.0cm/53.95cm/4.3cm) (48Y-8C)</li> <li>17.31in W/21.69in D/1.71in H (44.0cm/53.95cm/4.3cm) (48YE-8CE)</li> </ul>	<ul style="list-style-type: none"> <li>17.3in W/20.9in D/1.7in H (44.0cm/53.2cm/4.3cm)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>16.71 lb (7.58 kg) empty chassis (48Y-8C)</li> <li>22.29 lb (10.11 kg) with two AC PSUs (-F and -R models) (48Y-8C)</li> <li>20.35 lb (9.23 kg) empty chassis (48YE-8CE)</li> <li>26.23 lb (11.90 kg) with two AC PSUs (-F and -R models) (48YE-8CE)</li> </ul>	<ul style="list-style-type: none"> <li>16.34 lb (7.41 kg) no PSU</li> <li>20.88 lb (9.47 kg) with two AC PSUs (-F and -R models)</li> </ul>
Performance	<ul style="list-style-type: none"> <li>Line rate 4 Tbps Switching Capacity (2 Tbps ingress, 2 Tbps egress)</li> <li>Typical Latency: 800 ns</li> <li>Forwarding rate: 1000 Mpps</li> </ul>	<ul style="list-style-type: none"> <li>Line rate 2.16 Tbps Switching Capacity (1.08 Tbps ingress, 1.08 Tbps egress)</li> <li>Typical Latency: 2,400 ns</li> <li>Forwarding rate: 1000 Mpps</li> </ul>
CPU/Memory	<ul style="list-style-type: none"> <li>8-core Processor</li> <li>16GB DDR4 ECC memory</li> <li>128GB SSD memory</li> </ul>	<ul style="list-style-type: none"> <li>8-core Processor</li> <li>16GB DDR4 ECC memory</li> <li>128GB SSD memory</li> </ul>
Packet Buffers	32MB	32MB
Environmental Operating Conditions	AC/DC, one fan failed, front-to-back: <ul style="list-style-type: none"> <li>0°C (32°F) to 50°C (122°F) at sea level;</li> <li>0°C (32°F) to 40°C (104°F) up to 3000 m (10,000 ft)</li> </ul> AC/DC, one fan failed, back-to-front: <ul style="list-style-type: none"> <li>0°C (32°F) to 45°C (113°F) at sea level;</li> <li>0°C (32°F) to 40°C (104°F) up to 3000 m (10,000 ft)</li> </ul>	AC/DC, one fan failed, front-to-back: <ul style="list-style-type: none"> <li>0°C (32°F) to 50°C (122°F) at sea level;</li> <li>0°C (32°F) to 40°C (104°F) up to 3000 m (10,000 ft)</li> </ul> AC/DC, one fan failed, back-to-front: <ul style="list-style-type: none"> <li>0°C (32°F) to 45°C (113°F) at sea level;</li> <li>0°C (32°F) to 40°C (104°F) up to 3000 m (10,000 ft)</li> </ul>

## 7520 Software Scaling Values

### Switch Engine

MAC Table: 294,000  
IPv4 ARP Table: 184,000

IPv4 Route Table: 256,000  
IPv4 Multicast Entries (S,G,V): 104,000  
IPv6 Neighbor Table: 57,000  
IPv6 Route Table: 131,000  
ACLs (Ingress/Egress): 8,192/1,024

QoS Egress Queues per port: 8  
 VLANs: 4,094  
 Routed VLANs: 2,048

### One Policy Scaling

Policy Profiles: 63  
 Unique Permit/Deny Rules per switch: 16,312

### Fabric Engine

MAC Table: 160,000  
 IPv4 ARP Table: 40,000 with SPB  
 IPv4 Route Table: 15,000  
 IP Multicast Entries (S,G,V): 6,000

IPv6 Neighbor Table: 32,000  
 IPv6 Route Table: Up to 7,000  
 ACLs (Ingress/Egress): 512/254 for non-IPv6  
 QoS Egress Queues per port: 8  
 VLANs: 4,059  
 IP Interfaces (Routed VLANs): 1,000

### Fabric Connect Scaling

Fabric Adjacencies per switch: 255  
 BEB Nodes per VSN: 2,000  
 L2 VSNs: 4,000  
 L3 VSNs: 256

## Power and Heat Dissipation

Switch Model	Minimum Heat Dissipation (BTU/hr) (Idle, no ports linked)	Minimum Power Consumption (W) (Idle, no ports linked)	Maximum Heat Dissipation (BTU/hr) (Fans high, all ports 100% traffic)	Maximum Power Consumption (W) (Fans high, all ports 100% traffic)
7520-48XT-6C	407.48	119.42	1359.06	398.30
7520-48Y-8C	326.71	95.75	1307.36	383.15
7520-48YE-8CE	596.58	174.84	1638.51	480.20

## Power Supply Specifications

	800W AC PSU XN-ACPWR-800W-F/R	800WDC PSU XN-DCPWR-800W-F/R
Dimensions	3.15 in W x 1.57 in H x 8.11 in D (8.0 cm x 4.0 cm x 20.6 cm)	3.15 in W x 1.57 in H x 8.11 in D (8.0 cm x 4.0 cm x 20.6 cm)
Weight	1.79 lb (0.81kg)	1.85 lb (0.85kg)
Voltage Input Range	100VAC-140 VAC/200VAC-240 VAC	-48VDC to -60VDC
Line Frequency Range	50Hz– 60Hz	N/A
PSU Input Socket	IEC320 C14	Terminal Block
PSU Output Cord	IEC320 C13	N/A
Operating Conditions	0°C–55°C operation	0°C–55°C operation

## Environmental

### Environmental Specifications

EN/ETSI 300 019-2-1 v2.1.2 - Class 1.2 Storage  
 EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation  
 EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational  
 EN/ETSI 300 753 (1997-10) - Acoustic Noise  
 ASTM D3580 Random Vibration Unpackaged 1.5 G

### Environmental Compliance

EU RoHS - 2011/65/EU  
 EU WEEE - 2012/19/EU  
 EU REACH – Regulation (EC) No 1907/2006 Reporting  
 China RoHS - SJ/T 11363-2006  
 Taiwan RoHS - CNS 15663(2013.7)

## Environmental Operating Conditions

Temp: 0°C to 50°C (32°F to 122°F)

Humidity: 10% to 95% relative humidity, non-condensing

Altitude: 0 to 3,000 meters (9,850 feet)

Shock (half sine) 98m/s<sup>2</sup> (10G), 11ms, 18 shocks

Random vibration: 3Hz to 500Hz at 1.5 G rms

## Packaging and Storage Specifications

Temp: -40°C to 70°C (-40°F to 158°F)

Humidity: 10% to 95% relative humidity, non-condensing

Packaged Shock (half sine): 180 m/s<sup>2</sup> (18 G), 6 ms, 600 shocks

Packaged Vibration: 5Hz to 62Hz at velocity 5 mm/s, 62Hz to 500Hz at 0.2 G

Packaged Random Vibration: 5Hz to 20Hz at 1.0 ASD w/−3 dB/oct. from 20Hz to 200Hz

Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

## Regulatory and Safety

### North American ITE

UL 62368-1

UL/CuL62368-1 Listed

CAN/CSA-C22.2 No 60950-1-07 Incl. AM1 (2011) and AM2 (2014)

CAN/CSA C22.2 No. 62368-1:19

Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)

CDRH Letter of Approval (US FDA Approval)

### European ITE

EN 60950-1 2nd Edition

EN62368-1

EN 60825-1 Class 1 (Lasers Safety)

2014/35/EU Low Voltage Directive

### International ITE

CB Report & Certificate per IEC 60950-1

CB Report & Certificate IEC 62368-1

AS/NZS 62368.1:2022 (Australia/New Zealand)

## EMI/EMC Standards

### North American EMC for ITE

FCC CFR 47 Part 15 Class A (USA)

ICES-003 Class A (Canada)

### European EMC Standards

EN 55032 Class A

EN 55035

EN 55011

EN 61000-3-2,2014 (Harmonics)

EN 61000-3-3 2013 (Flicker)

EN 61000-6-2

EN 61000-6-4

EN 300 386 (EMC Telecommunications) 2014/30/EU EMC Directive

## International EMC Certifications

CISPR 32, Class A (International Emissions) AS/NZSCISPR32

CISPR24 Class A (International Immunity)

IEC 61000-4-2/EN 61000-4-2 Electrostatic Discharge, 8 kV Contact, 15 kV Air, Criteria B

IEC 61000-4-3/EN 61000-4-3 Radiated Immunity 10V/m, Criteria A

IEC 61000-4-4/EN 61000-4-4 Transient Burst, 2 kV, Criteria B

IEC 61000-4-5/EN 61000-4-5 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria B

IEC61000-4-6 Conducted Immunity, 0.15-80MHz, 10V/rms, 80%AM (1kHz), Criteria A

IEC/EN61000-4-11 Power Dips & Interruptions, >30%, 25 periods, Criteria C

## Country Specific

VCCI Class A (Japan Emissions)

ACMA RCM (Australia Emissions)

CQC Mark (China)

KCC Mark, EMC Approval (Korea)

BSMI (Taiwan)

Anatel (Brazil)

NoM (Mexico)

EAC (Russia, Belarus, Kazakhstan)

NRCS (South Africa)

TEC (India)

## IEEE 802.3 Media Access Standards

IEEE 802.3ab 1000BASE-T

IEEE 802.3ae 10GBASE-X

IEEE 802.3 10GBASE-T (up to 100m using Cat6a cabling or better)

IEE 802.3by-2016 25Gb/s Operation

IEEE 802.3ba/802.3bm 40 GBASE-X and 100 GBASE-X

## Ordering Notes

Customers ordering an AC-bundled version of the 7520 Series switch receive the hardware switch along with a Base software license, integrated power supply, fan modules, and rack-mount kit.

Customers ordering a non-bundled version of the 7520 Series switch customers will only receive the hardware switch, Base software license, and rackmount kit. Customers in this case, must order Power Supply Units (PSU) and fan modules separately.

At least one Power Supply Unit (PSU) is required for 7520 operations. Additional power supplies, transceiver/optics, power cords, as well as Premier license, must be ordered separately.

## Base Software and Optional Premier License

The Base software included with each 7520 unit supports most available software features. Certain features, however, require a Premier License to operate:

For Switch Engine, a Premier License is required for:

- 5 or more OSPF interfaces
- PIM DM/PIM SSM
- Anycast RP (Rendezvous Point)
- MultiSource Discovery Protocol (MSDP)
- IS-IS/BGP4/MBGP\*
- GRE Tunneling
- Ethernet VPN (EVPN)

\* Up to 2 BGP interfaces included in Base software

For Fabric Engine, a Premier License is required for :

- Layer 3 Virtual Services Networks (VSNs)
- Distributed Virtual Routing Controller

VXLAN Gateway

5 or more active OSPF interfaces

17 or more BGP peers

Insight Architecture/Integrated Application Hosting (IAH)

## Power Supplies for Use with Your Switch

Each 7520 Series switch runs with two replaceable internal power supply modules that provide all of the power needed for the switch to operate. You can remove one power supply module without interrupting the switch's operation. Supported power supply configurations include two 800W AC power supply modules, two 800W DC power supply modules, or one 800W AC and one 800W DC power supply module. Power supply modules have integrated cooling fans that operate independently of the switch fans and are available with front-to-back or back-to-front airflow. The direction of the airflow in both power supply modules must be in the same direction and must also be in the same direction of the airflow in the fan modules.

## Ordering Information

Part Number	Product Name	Description
7520-48XT-6C	7520-48XT Base System	Extreme 7520-48XT Switch - Ships with two empty power supply slots, six empty fan slots, one 4-post rack mount kit. Supports 48 x 1G/10G copper ports and 6 x 40G/100G fiber ports
7520-48XT-6C-AC-F	7520-48XT with front-to-back airflow	Extreme 7520-48XT Switch - Ships with two AC front-to-back airflow power supplies, six front- to-back airflow fans, one 4-post rack mount kit. Supports 48 x 1G/10G copper ports and 6 x 40G/100G fiber ports
7520-48XT-6C-AC-R	7520-48XT with back-to-front airflow	Extreme 7520-48XT Switch - Ships with two AC back-to-front airflow power supplies, six back- to-front airflow fans, one 4-post rack mount kit. Supports 48 x 1G/10G copper ports and 6 x 40G/100G fiber ports
7520-48Y-8C*	7520-48Y Base System	Extreme 7520-48Y Switch with two empty power supply slots, six empty fan slots, Ships with one 4-post rack mount kit. Supports 48 x 1G/10G/25G fiber ports and 8 x 40G/100G fiber ports
7520-48YE-8CE*	7520-48YE Base System	Extreme 7520-48YE Switch with two empty power supply slots, six empty fan slots, Ships with one 4-post rack mount kit. Supports 48 x 10G/25G fiber ports and 8 x 40G/100G fiber ports. Includes embedded MACsec capabilities.
7520-48Y-8C-AC-F*	7520-48Y with front- to-back airflow	Extreme 7520-48Y Switch - Ships with two AC front-to-back airflow power supplies, six front- to-back airflow fans, one 4-post rack mount kit. Supports 48 x 1G/10G/25G fiber ports and 8 x 40G/100G fiber ports
7520-48YE-8CE-AC-F*	7520-48YE with front-to-back airflow	Extreme 7520-48YE Switch - Ships with two AC front-to-back airflow power supplies, six front- to-back airflow fans, one 4-post rack mount kit. Supports 48 x 10G/25G fiber ports and 8 x 40G/100G fiber ports. Includes embedded MACsec capabilities.

Part Number	Product Name	Description
7520-48Y-8C-AC-R*	7520-48Y with back- to-front airflow	Extreme 7520-48Y Switch - Ships with two AC back-to-front airflow power supplies, six back- to-front airflow fans, one 4-post rack mount kit. Supports 48 x 1G/10G/25G fiber ports and 8 x 40G/100G fiber ports
7520-48YE-8CE-AC-R*	7520-48YE-8CE-AC-R with back-to- front airflow	Extreme 7520-48YE Switch - Ships with two AC back-to-front airflow power supplies, six back- to-front airflow fans, one 4-post rack mount kit. Supports 48 x 10G/25G fiber ports and 8 x 40G/100G fiber ports. Includes embedded MACsec capabilities.

\* When running Fabric Engine on the 7520, 2 of the 7520 uplink ports are blocked in support of Ethernet Fabric Connect (SPB) functionality.

## Accessories

Part Number	Product Name	Description
XN-ACPWR-800W-F	800W AC PSU (Front-to-Back)	AC800W PSU, Front to Back Airflow for use in 7520, 7720
XN-ACPWR-800W-R	800W AC PSU (Back-to-Front)	AC800W PSU, Back to Front Airflow for use in 7520, 7720
XN-DCPWR-800W-F	800W DC PSU (Front-to-Back)	DC800W PSU, Front to Back Airflow for use in 7520, 7720
XN-DCPWR-800W-R	800W DC PSU (Back-to-Front)	DC800W PSU, Back to Front Airflow for use in 7520, 7720
XN-FAN-001-F	Fan Module (Front-to-Back)	Single fan module Front to Back Airflow (also used in X695, VSP 7400, SLX 9150, SLX 9250, 7720, 8520, and 8720)
XN-FAN-001-R	Fan Module (Back-to-Front)	Single fan module Back to Front Airflow (also used in X695, VSP 7400, SLX 9150, SLX 9250, 7720, 8520, and 8720)
XN-2P-RKMT299	Two-post rack mount kit	Two-post rack mount kit for 7520 and 7720 switches
XN-4P-RKMT298	Four-post rack mount kit	Four-post rack mount kit for 7520-48Y, 7520-48XT, and 7720 switches
XN-4P-RKMT302	Four-post rack mount kit	Four-post rack mount kit for 7520-48YE switches

## Software Licenses

Part Number	Product Name	Description
7000-PRMR-LIC-P	Premier License for 7000 Series	Perpetual Premier License for Extreme 7000 series (Includes Integrated Application Hosting)
7000-MACSEC-LIC-P	MACsec License for 7000 Series	Perpetual MACsec License for Extreme 7000 series

## Warranty

All 7520 Series models are covered under Extreme's Universal LLW policy. For warranty details, visit: <http://www.extremenetworks.com/support/policies>

## Maintenance Services

Extreme's maintenance and support services with 100% in-sourced engineering experts and over 90% first-person resolution ensure efficient operation of your business-essential network. 24x7x365 phone support, advanced parts replacement, and on-site support augment your staff with experienced resources that help you mitigate critical network issues fast. Visit our [ExtremeWorks Maintenance Services page](#) for more information.

## Optics/Transceivers

For a list of the optics/transceivers supported on the 7520 Series, refer to our [Extreme Optics Compatibility Tool](#).

## Power Cords

In support of Extreme Networks green initiatives, power cords are not included with the 7520 but can be ordered separately. They should be specified at time of ordering.





Networks Trademarks, see <https://www.extremenetworks.com/about-extreme-networks/company/legal/trademarks>. Specifications and product availability are subject to change without notice. 15apr24