

5520 Series Switches




Highlights

- Manageable by Extreme Platform ONE™, ExtremeCloud™ IQ, or ExtremeCloud IQ Site Engine
- Fabric-enabled operations with Extreme Fabric for simplified and secure network provisioning and automation
- Choice of operating system (OS) with dual-persona Universal Hardware
- Automated Extreme Platform ONE Security policy enforcement
- Automated and streamlined switch provisioning and day-to-day operations with cloud-based instant actions
- Fixed 24 and 48-port switches with gigabit and multi-gigabit support
- Front to back cooling with AC power on all models
- Back to front cooling with DC power on select models

Key Hardware Features

- Choice of 10Gb and 25Gb modular uplink ports
- 30W, 60W and 90W PoE support for powering connected devices
- 200Gb per unit stacking of up to eight switches
- Hot-swappable, redundant power supplies and fans
- MACsec on access and modular uplink ports for secure link encryption
- Extended Edge Switching controlling bridge in support of V300/V400 edge devices
- Non-blocking, wire-speed design

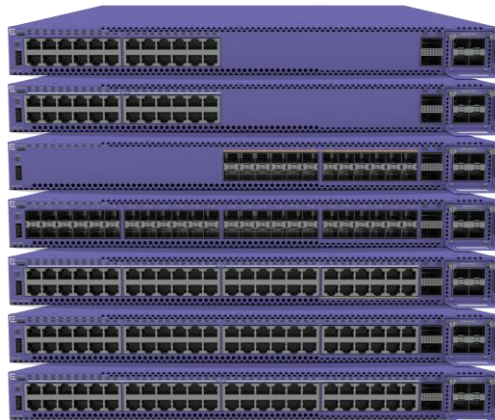

Universal Edge/Aggregation Switches

The 5520 Series is a family of high-performance, feature-rich edge and aggregation switches designed for the next-generation digital enterprise. Available in 24 and 48-port 1 Gigabit models, 1/2.5/5 Gigabit multi-rate models, as well as a 24-port 10 Gigabit model, the 5520 Series provides end-to-end secure network segmentation and advanced policy capabilities that can be deployed across a range of edge, aggregation, and wiring closet environments. As a universal hardware solution, the 5520 offers a user-selectable choice of Extreme's flagship switch operating systems.

The 5520 supports 10Gb and 25Gb modular uplinks for flexible linkage to other switches or devices over a range of media. Extended Edge Switching controlling bridge is also available in support of V300/V400 edge devices, and select models offer a choice between Front to Back or Back to Front cooling. The 5520 Series offers 30W, 60W, and 90W PoE, making it an ideal wired backend for wireless APs or in support of next-gen powered Ethernet devices, such as digital signage, pan-tilt-zoom cameras, smart lighting, or point-of-sale terminals.

Network Management Flexibility

The 5520 Universal Switch series are managed by Extreme Platform ONE or ExtremeCloud IQ from the cloud or on premises. Alternatively, 5520 on box management can be done manually via a web-based GUI or generic command-line interface (CLI).

Extreme Platform ONE™

Extreme Platform ONE is an enterprise connectivity platform that integrates networking and security with AI into one powerful and radically simplified experience and licensing model. It supports NetOps, SecOps, and business teams with built-in automation and enables organizations to regain control, unlock innovation, and boost productivity through:

- One integrated experience that is easy to use.
- Automation through built-in AI that boosts productivity, reducing cycle time for many tasks from hours to minutes.
- Simplified licensing that makes the solution as easy to buy as it is to use.
- AI-powered workflows for configuration, deployment, and management.
- Extreme Fabric and third-party switch visualization and management in cloud.
- Inventory management simplifies budgeting, planning and compliance.

Power over Ethernet (PoE)

All 5520 models support 30W, 60W, and 90W PoE that conforms with IEEE 802.3bt. This enables the 5520 to address the needs of powered edge devices, while eliminating the need for additional electrical cabling and circuits. In addition, 5520 PoE models support perpetual and fast PoE for even more efficient and reliable powered edge device operation.

VIM Options for Flexible Uplinks

The 5520 supports Versatile Interface Modules (VIMs) providing flexible uplink capabilities with a single VIM slot. VIM options include four-port 10Gb or 25Gb modules that include LRM and 256-bit MACsec support.

High-Performance Stacking

The 5520 Series supports high-speed 200Gb* stacking when running Switch Engine via its two built-in QSFP28 stacking ports. Up to eight systems can be stacked using qualified QSFP+ direct attach cables and optical transceivers.

*200Gb stacking available with Switch Engine 31.6

Audio Video Bridging

The 5520 series supports IEEE 802.1 Audio Video Bridging (AVB) when running Switch Engine OS. This allows 5520 models to deliver reliable, real-time audio/video transmission over Ethernet, meeting the quality of service required for today's high-definition, time-sensitive multimedia streams.

Universal Hardware

The 5520 Series comes with a dual-persona capability, allowing you to choose your Operating System (OS). Either the Switch Engine (EXOS) or Fabric Engine (VOSS) OS can be selected at switch start-up or changed at a later stage. When selected, the switch assumes the features and capabilities of that OS. 5520 OS selection can also be automated with Extreme Platform ONE or ExtremeCloud IQ so that the desired OS can be automatically loaded at switch start-up, facilitating remote OS enablement.

Security

Extreme Universal hardware enables the extension and enforcement of Fabric and Extreme Platform ONE Security policies. Wherever users connect through the network, their access is secure and segmented. Extreme Platform ONE Security, which combines zero trust network and application access into a single solution, automatically configures devices to enforce security policies with one click. When used in concert with Extreme Fabric, Extreme Platform ONE Security becomes part of the fabric services that automate segmentation and enable the network to flex for efficiency and resiliency while maintaining a consistent, end-to-end security policy.

Network Fabric

The 5520 series switches support Extreme's network fabric natively for network virtualization, automation, and network security. Extreme Fabric is the industry's most simple, resilient, and secure end-to-end, enterprise network fabric solution. Fabric automates discovery and onboarding of network and user devices. Its sub-second convergence reduces unplanned downtime and maintenance windows. Automated micro-segmentation and stealth topology enhance and automate network security across campus, data center, and branch. Fabric is included free with the purchase of the 5520, no additional licenses or controllers are required.

Instant Onboarding

5520 Series onboarding to the cloud is a hands-off operation using zero touch provisioning. Simply unpack the 5520 Series switch, connect it to the network, and it automatically connects to the cloud, ready to be provisioned. New switches can be configured, one-by-one, with a few clicks. Instant Port, Instant Secure Port, and Instant Stack all further reduce time spent on deployment.

Instant Port*

Instant Port automates adds, moves or changes across 5520 Series switch ports, eliminating the need for manual port configuration. The 5520 Series automatically detects the connected device and applies the correct port parameters. The result is significant time savings when adding or moving devices across the 5520 Series wired network. A simple cloud interface allows Instant Port definitions of customer designated device types which can then be applied across a single switch, a stack, or even all 5520 Series switches in the network.

*** Supported via Switch Engine only**

Instant Secure Port*

Instant Secure Port leverages Extreme Platform ONE Security for authentication and zero trust policy enforcement across the 5520 Series switch ports, while providing the same add, move, and change automation features of Instant Port. By using Extreme Platform ONE Security's cloud-based capabilities, including RADIUS (Remote Authentication Dial In User Service), unified visibility and reporting, as well as policy enforced locally on 5520 Series ports, it greatly simplifies switch security. In doing so, it delivers a consistent and frictionless security experience for any user or device connecting through the 5520 Series switch.

Note: Extreme Platform ONE Security requires a separate license.

Instant Stack*

Instant Stack simplifies cloud-based stack provisioning, enabling the entire switch stack to be set up through a single push-button operation. Real-world stack information, including each switch model and their stack order is captured and replicated in the cloud. Once set up, the entire stack is then ready to be cloud provisioned.

External Interfaces

Switch Model	Interfaces
5520-24T	<ul style="list-style-type: none"> • 24 x 10/100/1000BASE-T ports <ul style="list-style-type: none"> ○ Full / Half-Duplex (autosensing) ○ MACsec-capable • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot 1
5520-24W	<ul style="list-style-type: none"> • 24 x 10/100/1000BASE-T 802.3bt (90W) ports <ul style="list-style-type: none"> ○ Full / Half-Duplex (autosensing) ○ MACsec-capable • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot 1
5520-48T	<ul style="list-style-type: none"> • 48 x 10/100/1000BASE-T ports <ul style="list-style-type: none"> ○ Full / Half-Duplex (autosensing) ○ MACsec-capable • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot 1
5520-48W	<ul style="list-style-type: none"> • 48 x 10/100/1000BASE-T 802.3bt (90W) ports <ul style="list-style-type: none"> ○ Full / Half-Duplex (autosensing) ○ MACsec-capable • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot 1
5520-12MW-36W	<ul style="list-style-type: none"> • 12 x 100M/1/2.5/5GBASE-T 802.3bt (90W) PoE ports • 36 x 10/100/1000BASE-T 802.3bt (90W) PoE ports <ul style="list-style-type: none"> ○ Full / Half-Duplex (autosensing) ○ MACsec-capable • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot 1
5520-48SE	<ul style="list-style-type: none"> • 48 x 100/1000BASE-X (SFP) ports (unpopulated) <ul style="list-style-type: none"> ○ MACsec-capable • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot
5520-24X	<ul style="list-style-type: none"> • 24 x 100M/1G/10GBASE-X (SFP+) ports** (unpopulated) • 2 x Stacking/QSFP28 ports* (unpopulated) • 1 x Serial console port (RJ-45) • 1 x 10/100/1000BASE-T out-of-band management port • 2 x USB A ports for management or external USB flash • 1 x USB Micro-B console port • 1 x VIM slot

Switch Model	Interfaces
5520-24T-ACDC	<ul style="list-style-type: none"> • 24 x 10/100/1000BASE-T FDX/HDX MACsec capable ports • 2 stacking/QSFP28 ports • 1 unpopulated VIM slot • 3 unpopulated modular fan slots • 2 unpopulated modular PSU slots • AC or DC PSU capable
5520-48T-ACDC	<ul style="list-style-type: none"> • 48 x 10/100/1000BASE-T FDX/HDX MACsec capable ports • 2 stacking/QSFP28 ports • 1 unpopulated VIM slot • 3 unpopulated modular fan slots • 2 unpopulated modular PSU slots • AC or DC PSU capable
5520-24X-ACDC	<ul style="list-style-type: none"> • 24 x 100M/1Gb/10Gb SFP+ ports** (unpopulated) • 2 stacking/QSFP28 ports (unpopulated) • 1 unpopulated VIM slot • 3 unpopulated modular fan slots • 2 unpopulated modular PSU slots • AC or DC PSU capable
5520-48SE-ACDC	<ul style="list-style-type: none"> • 48 x 100/1000BASE-X SFP MACsec capable ports (unpopulated) • 2 stacking/QSFP28 ports (unpopulated) • 1 unpopulated VIM slot • 3 unpopulated modular fan slots • 2 unpopulated modular PSU slots • AC or DC PSU capable
5520-VIM-4X	<ul style="list-style-type: none"> • 4 x 1/10GBASE-X SFP+ ports (unpopulated)
5520-VIM-4XE	<ul style="list-style-type: none"> • 4 x 1/10GBASE-X SFP+ ports (unpopulated) <ul style="list-style-type: none"> ○ LRM-capable ○ MACsec-capable
5520-VIM-4YE	<ul style="list-style-type: none"> • 4 x 10/25GBASE-X SFP28 ports (unpopulated) <ul style="list-style-type: none"> ○ MACsec-capable

* Notes on use of the 2 x Stacking/QSFP28 ports

1. With Switch Engine, the 2 x QSFP28 ports can be used for stacking or as Ethernet uplink ports (when not stacking); stacking data rate is 40Gb or 50Gb per port.
2. With Fabric Engine, the 2 x QSFP28 ports can be used as Ethernet uplink ports if in non-Fabric mode or if no VIM is present as of the VOSS 8.4.2 release.
3. Ethernet uplink QSFP28 data rate options per port, with channelization: 4 x 10Gb SFP+, 4 x 25Gb SFP28, 1 x 40Gb QSFP+ (supported with Switch Engine and Fabric Engine); 2 x 50Gb (Switch Engine only)

** 100M on 5520-24x and 5520-24x-ACDC access ports supported with Switch Engine and with Fabric Engine. Refer to the Extreme Optics Compatibility Tool.

Performance and Scaling

Switch Model	Max Active 10Mb/100Mb/1000Mb Ports	Max Active 100Mb/1Gb/2.5Gb/5Gb Ports	Max Active 100Mb/1Gb SFP Ports	Max Active 1Gb/10Gb SFP+ Ports ¹	Max Active 25Gb SFP28 Ports ¹	Max Active 40Gb QSFP+ Ports ²	Max Active 50Gb Ports ²	Max Active 40Gb/50Gb Stacking Ports ³	Aggregated Switch Bandwidth	Frame Forwarding Rate
5520-24T	24	0	0	12	12	2	4	2	648 Gbps	482.1 Mpps
5520-24W	24	0	0	12	12	2	4	2	648 Gbps	482.1 Mpps
5520-48T	48	0	0	12	12	2	4	2	696 Gbps	517.8 Mpps
5520-48W	48	0	0	12	12	2	4	2	696 Gbps	517.8 Mpps
5520-12MW-36W	36	12	0	12	12	2	4	2	792 Gbps	589.3 Mpps
5520-48SE	0	0	48	12	12	2	4	2	696 Gbps	517.8 Mpps
5520-24X	0	0	24	36	12	2	4	2	1080 Gbps	803.5 Mpps
5520-24T-ACDC	24	0	0	12	12	2	4	2	648 Gbps	482.1 Mpps
5520-48T-ACDC	48	0	0	12	12	2	4	2	696 Gbps	517.8 Mpps
5520-24X-ACDC	0	0	24	36	12	2	4	2	1080 Gbps	803.5 Mpps
5520-48SE-ACDC	0	0	48	12	12	2	4	2	696 Gbps	517.8 Mpps

¹ Includes 8 ports (10Gb speed only, 1Gb not supported) available through channelization of the 2 x QSFP28 ports when not used for stacking with Switch Engine, or with VOSS 8.4.2 or later

² Available through channelization of the 2 x QSFP28 ports when these ports are not used for stacking in Switch Engine, or with VOSS 8.4.2 or later

³ 50Gb stacking with Switch Engine mode only 31.6 or later

Software Scaling

5520 with Switch Engine

- MAC Table: 114,688/65,536
- IPv4 ARP Table: 60,000/41,000*
- IPv4 Route Table: 81,000/16,000*
- IP Multicast Entries (S,G,V): 43,000/24,000*
- IPv6 ND Table: 18,000
- IPv6 Route Table: 40,000/8,000*
- ACL (Ingress/Egress): 9,216/1,024
- QoS Egress Queues/Port: 8
- VLANs: 4,094
- Routed VLANs: 2,048

* First value is the maximum; second is the default. Scaling limits are configurable. See the Switch Engine Release Notes for additional details.

One Policy Scaling

- Policy Profiles: 63
- Unique Permit/deny rules per switch: 8,120
- Authenticated policy users/switch: 9,216

5520 with Fabric Engine

- MAC Table: 40,960 (81,920 non-Fabric)
- IPv4 ARP/IP Host Table: 16,000/48,000
- IPv4 Route Table: 15,500
- IP Multicast Routes: 4,000
- IPv6 ND Table: 16,000
- IPv6 Route Table: 7,500
- IPv4 ACL (Ingress/Egress): 1,024/336
- QoS Egress Queues/Port: 8MAC Table: 32,000
- VLANs: 4,059
- Routed VLANs: 500

Fabric Connect Scaling

- Fabric Adjacencies per switch: 128
- BEB Nodes per VSN: 500
- L2 VSN: 3500
- L3 VSN: 256

Weights and Dimensions

Switches

Switch Model	Weight*	Physical Dimensions	
		Chassis Only	With PSU
5520-24T	5.54 kg (12.21 lb.)	Height: 44 mm (1.73 in.) Width: 441 mm (17.36 in.) Depth: 442 mm (17.42 in.)	Height: 44 mm (1.73 in.) Width: 441 mm (17.36 in.) Depth: 449 mm (17.68 in.)
5520-24W	6.25 kg (13.78 lb.)		
5520-48T	5.76 kg (12.70 lb.)		
5520-48W	6.06 kg (13.36 lb.)		
5520-12MW-36W	6.33 kg (13.96 lb.)		
5520-48SE	5.70 kg (12.57 lb.)		
5520-24X	6.25 kg (13.78 lb.)	Height: 43 mm (1.71 in.) Width: 431 mm (16.98 in.) Depth: 442 mm (17.42 in.)	Not applicable
5520-24T-ACDC	5.15 kg (11.35 lb.)		
5520-48T-ACDC	5.95 kg (13.12 lb.)		
5520-24X-ACDC	5.68 kg (12.52 lb.)		
5520-48SE-ACDC	5.91 kg (13.03 lb.)		

* Switch weights include fans but no PSUs

VIM Modules

Model	Weight*	Physical Dimensions
5520-VIM-4X	0.17 kg (0.37 lb.)	Height: 40.8 mm (1.61 in.) Width: 48.8 mm (1.92 in.) Depth: 146.3 mm (5.76 in.)
5520-VIM-4XE	0.20 kg (0.44 lb.)	
5520-VIM-4YE	0.21 kg (0.46 lb.)	

Power Supplies

Model	Weight*	Physical Dimensions
XN-ACPWR-350W-FB (350W AC)	1.08 kg (2.38 lb.)	Height: 40.8 mm (1.61 in.) Width: 48.8 mm (1.92 in.) Depth: 146.3 mm (5.76 in.)
XN-ACPWR-715W-FB (715W AC)	1.16 kg (2.56 lb.)	
XN-ACPWR-1100W-FB (1100W AC)	1.16 kg (2.56 lb.)	
XN-ACPWR-2000W-FB (2000W AC)	1.16 kg (2.56 lb.)	Height: 75 mm (2.95 in.) Width: 40 mm (1.57 in.) Depth: 292 mm (11.50 in.)
XN-ACPWR-550W-FB	0.81 kg (1.79 lb.)	Height: 40 mm (1.58 in.) Width: 73.7 mm (2.90 in.) Depth: 185.2 mm (7.29 in.)
XN-ACPWR-550W-BF	0.81 kg (1.79 lb.)	
XN-DCPWR-550W-FB	0.81 kg (1.79 lb.)	
XN-DCPWR-550W-BF	0.81 kg (1.79 lb.)	

Power Supply Unit Specifications

Item	XN-ACPWR-350W-FB	XN-ACPWR-350W-BF	XN-ACPWR-715W-FB	XN-ACPWR-1100W-FB	XN-ACPWR-2000W-FB*
Voltage Input Range (Nominal)	100VAC-240VAC	100VAC-240VAC	100VAC-240VAC	100VAC-240VAC	100VAC-240VAC
Line Frequency Range	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz
Power Supply Input Socket	IEC/EN 60320 C14	IEC/EN 60320 C14	IEC/EN 60320 C16	IEC/EN 60320 C16	IEC/EN 60320 C16
Power Cord Input Plug	IEC/EN 60320 C13	IEC/EN 60320 C13	IEC/EN 60320 C15	IEC/EN 60320 C15	IEC/EN 60320 C15
Operating Temperature	0°C to 55°C (32°F to 131°F) Normal Operation	0°C to 55°C (32°F to 131°F) Normal Operation	0°C to 50°C (32°F to 122°F) Normal Operation	0°C to 50°C (32°F to 122°F) Normal Operation	0°C to 50°C (32°F to 122°F) Normal Operation

* 200VAC-240VAC is required to achieve full 2000W output. If run at 100VAC-120VAC, output is limited to 1100W.

Item	XN-ACPWR-550W-FB	XN-ACPWR-550W-BF	XN-DCPWR-550W-FB	XN-DCPWR-550W-BF
Voltage Input Range (Nominal)	100VAC-240VAC	100VAC-240VAC	100VAC-240VAC	100VAC-240VAC
Line Frequency Range	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz
Power Supply Input Socket	IEC 320 - C14	IEC 320 - C14	POSITRONIC PN# PLAH03M400A1/AA-E1A	POSITRONIC PN# PLAH03M400A1/AA-E1A
Power Cord Input Plug	IEC 320 - C13	IEC 320 - C13	POSITRONIC PN# PLAH03M400A1/AA-E1A	POSITRONIC PN# PLAH03M400A1/AA-E1A
Operating Temperature	0°C to 50°C (32°F to 122°F) Normal Operation	0°C to 50°C (32°F to 122°F) Normal Operation	0°C to 50°C (32°F to 122°F) Normal Operation	0°C to 50°C (32°F to 122°F) Normal Operation

PoE Power Budget

Switches

Switch Model	1 x 715W	2x 715W	1 x 1100W	2 x 1100W	1 x 2000W @ 100-120VAC	1 x 2000W @ 200-240VAC	2 x 2000W @ 100-120VAC	2 x 2000W @ 200-240VAC
5520-24W	494W	1079W	879W	1781W	879W	1779W	1869W	2160W
5520-48W	483W	1068W	868W	1770W	868W	1768W	1858W	3568W
5520-12MW-36W	464W	1049W	849W	1751W	849W	1749W	1839W	3549W

Note: It is recommended that primary and secondary power supply units (PSUs) be of the same type to support optimal PoE operation.

Minimum/Maximum Power Consumption and Heat Dissipation

Switch Model	Minimum Power Consumption (W)	Minimum Heat Dissipation (BTU/hr)	Maximum Power Consumption (W)*	Maximum Heat Dissipation (BTU/hr)**
5520-24T	52	176	142	483
5520-24W	54	182	2480	1092
5520-48T	60	205	171	584
5520-48W	59	203	4100	1817
5520-12MW-36W	66	224	4095	1862
5520-48SE	61	209	255	872
5520-24X	48	165	171	585
5520-24T-ACDC	41	140	135	459
5520-48T-ACDC	46	156	141	481
5520-24X-ACDC	39	132	169	575
5520-48SE-ACDC	45	154	223	760

* Includes maximum PoE load (W) through the switch

** Does not include PoE load heat dissipated through external electronic load

Fan and Acoustic Noise

Switch Model	Acoustic Information	
5520-24T	Typical: Single 350W AC PSU, no VIM Maximum: Dual 350W AC PSU, 5520-VIM-4YE	
	Bystander Sound Pressure 39.6 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 77.5 dB(A), 50°C (122°F) (Maximum)	Sound Power 5.1 B, 0°C to 35°C (32°F to 95°F) (Typical) 8.46 B, 50°C (122°F) (Maximum)
5520-24W	Typical: Single 715W AC PSU, no VIM Maximum: Dual 1100W AC PSU, 5520-VIM-4YE	
	Bystander Sound Pressure 50.4 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 67.1 dB(A), 25°C (77°F) (Maximum) 78.9 dB(A), 50°C (122°F) (Maximum)	Sound Power 6 B, 0°C to 35°C (32°F to 95°F) (Typical) 7.61 B, 25°C (77°F) (Maximum) 8.6 B, 50°C (122°F) (Maximum)
5520-48T	Typical: Single 350W AC PSU, no VIM Maximum: Dual 350W AC PSU, 5520-VIM-4YE	
	Bystander Sound Pressure 39.0 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 79.0 dB(A), 50°C (122°F) (Maximum)	Sound Power 4.9 B, 0°C to 35°C (32°F to 95°F) (Typical) 8.52 B, 50°C (122°F) (Maximum)
5520-48W	Typical: Single 1100W AC PSU, no VIM Maximum: Dual 2000W AC PSU (240VAC), 5520-VIM-4YE	
	Bystander Sound Pressure 64.3 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 69.1 dB(A), 25°C (77°F) (Maximum) 79.4 dB(A), 50°C (122°F) (Maximum)	Sound Power 7.24 B, 0°C to 35°C (32°F to 95°F) (Typical) 7.65 B, 25°C (77°F) (Maximum) 8.6 B, 50°C (122°F) (Maximum)
5520-12MW-36W	Typical: Single 1100W AC PSU, no VIM Maximum: Dual 2000W AC PSU (240VAC), 5520-VIM-4YE	
	Bystander Sound Pressure 62.7 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 69.2 dB(A), 25°C (77°F) (Maximum) 78.8 dB(A), 50°C (122°F) (Maximum)	Sound Power 7.25 B, 0°C to 35°C (32°F to 95°F) (Typical) 7.64 B, 25°C (77°F) (Maximum) 8.6 B, 50°C (122°F) (Maximum)
5520-48SE	Typical: Single 350W AC PSU, no VIM Maximum: Dual 350W AC PSU, 5520-VIM-4YE	
	Bystander Sound Pressure 41.4 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 77.9 dB(A), 50°C (122°F) (Maximum)	Sound Power 5.14 B, 0°C to 35°C (32°F to 95°F) (Typical) 8.53 B, 50°C (122°F) (Maximum)
5520-24X	Typical: Single 350W AC PSU, no VIM Maximum: Dual 350W AC PSU, 5520-VIM-4YE	
	Bystander Sound Pressure 40.6 dB(A), 0°C to 35°C (32°F to 95°F) (Typical) 76.9 dB(A), 50°C (122°F) (Maximum)	Sound Power 5.05 B, 0°C to 35°C (32°F to 95°F) (Typical) 8.52 B, 50°C (122°F) (Maximum)
5520-48SE-ACDC	Typical: F2B Airflow; Single 550W AC PSU, no VIM Maximum: F2B Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 39.0 dB(A), 0°C to 40°C (Typical) 76.6 dB(A), 50°C (Maximum)	Sound Power 4.98 B, 0°C to 40°C (Typical) 8.65 B, 50°C (Maximum)
	Typical: F2B Airflow; Single 550W DC PSU, no VIM Maximum: F2B Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.7 dB(A), 0°C to 40°C (Typical) 77.2 dB(A), 50°C (Maximum)	Sound Power 4.96 B, 0°C to 40°C (Typical) 8.64 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W AC PSU, no VIM Maximum: B2F Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.9 dB(A), 0°C to 40°C (Typical) 77.4 dB(A), 50°C (Maximum)	Sound Power 4.95 B, 0°C to 40°C (Typical) 8.65 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W DC PSU, no VIM Maximum: B2F Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
Bystander Sound Pressure 40.2 dB(A), 0°C to 40°C (Typical) 79.5 dB(A), 50°C (Maximum)	Sound Power 5.04 B, 0°C to 40°C (Typical) 8.75 B, 50°C (Maximum)	

Switch Model	Acoustic Information	
5520-24X-ACDC	Typical: F2B Airflow; Single 550W AC PSU, no VIM Maximum: F2B Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.1 dB(A), 0°C to 40°C (Typical) 75.8 dB(A), 50°C (Maximum)	Sound Power 4.90 B, 0°C to 40°C (Typical) 8.59 B, 50°C (Maximum)
	Typical: F2B Airflow; Single 550W DC PSU, no VIM Maximum: F2B Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.0 dB(A), 0°C to 40°C (Typical) 76.6 dB(A), 50°C (Maximum)	Sound Power 4.88 B, 0°C to 40°C (Typical) 8.53 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W AC PSU, no VIM Maximum: B2F Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.3 dB(A), 0°C to 40°C (Typical) 77.3 dB(A), 50°C (Maximum)	Sound Power 4.94 B, 0°C to 40°C (Typical) 8.64 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W DC PSU, no VIM Maximum: B2F Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 40.1 dB(A), 0°C to 40°C (Typical) 79.3 dB(A), 50°C (Maximum)	Sound Power 4.94 B, 0°C to 40°C (Typical) 8.73 B, 50°C (Maximum)
5520-24T-ACDC	Typical: F2B Airflow; Single 550W AC PSU, no VIM Maximum: F2B Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.6 dB(A), 0°C to 40°C (Typical) 76.5 dB(A), 50°C (Maximum)	Sound Power 4.94 B, 0°C to 40°C (Typical) 8.60 B, 50°C (Maximum)
	Typical: F2B Airflow; Single 550W DC PSU, no VIM Maximum: F2B Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.2 dB(A), 0°C to 40°C (Typical) 77.0 dB(A), 50°C (Maximum)	Sound Power 4.89 B, 0°C to 40°C (Typical) 8.56 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W AC PSU, no VIM Maximum: B2F Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.46dB(A), 0°C to 40°C (Typical) 76.6 dB(A), 50°C (Maximum)	Sound Power 4.99 B, 0°C to 40°C (Typical) 8.61 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W DC PSU, no VIM Maximum: B2F Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 39.8 dB(A), 0°C to 40°C (Typical) 79.0 dB(A), 50°C (Maximum)	Sound Power 5.03 B, 0°C to 40°C (Typical) 8.69 B, 50°C (Maximum)
5520-48T-ACDC	Typical: F2B Airflow; Single 550W AC PSU, no VIM Maximum: F2B Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.2 dB(A), 0°C to 40°C (Typical) 76.4 dB(A), 50°C (Maximum)	Sound Power 4.91 B, 0°C to 40°C (Typical) 8.58 B, 50°C (Maximum)
	Typical: F2B Airflow; Single 550W DC PSU, no VIM Maximum: F2B Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.1 dB(A), 0°C to 40°C (Typical) 77.1 dB(A), 50°C (Maximum)	Sound Power 4.88 B, 0°C to 40°C (Typical) 8.55 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W AC PSU, no VIM Maximum: B2F Airflow; Dual 550W AC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 38.5 dB(A), 0°C to 40°C (Typical) 76.7 dB(A), 50°C (Maximum)	Sound Power 4.94 B, 0°C to 40°C (Typical) 8.54 B, 50°C (Maximum)
	Typical: B2F Airflow; Single 550W DC PSU, no VIM Maximum: B2F Airflow; Dual 550W DC PSU, with 5520-VIM-4YE	
	Bystander Sound Pressure 39.6 dB(A), 0°C to 40°C (Typical) 79.0 dB(A), 50°C (Maximum)	Sound Power 5.00 B, 0°C to 40°C (Typical) 8.70 B, 50°C (Maximum)

Product Specifications

Environmental

Environmental Specifications

- EN/ETSI 300 019-2-1 v2.1.2 – Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 – Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 – Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) – Acoustic Noise
- ASTM D3580 Random Vibration Unpackaged 1.5 G

Environmental Compliance

- EU RoHS – 2011/65/EU
- EU WEEE – 2012/19/EU
- EU REACH – Regulation (EC) No 1907/2006 – Reporting
- China RoHS – SJ/T 11363-2006
- Taiwan RoHS – CNS 15663 (2013.7)

Environmental Operating Conditions

- Temp: 0°C to 50°C (32°F to 122°F) for Front-Back cooling
- Temp: 0°C to 45°C (32°F to 113°F) for Back-Front cooling (5520-24T, 5520-24X, 5520-48T, 5520-48SE)
- Humidity: 5% to 95% relative humidity, non-condensing
- Altitude: 0 to 3,000 meters (9,850 feet)
- Shock (half sine): 98m/s² (10G), 11 ms, 18 shocks
- Random vibration: 3 Hz to 500 Hz at 1.5 G rms

Packaging and Storage Specifications

- Temp: -40°C to 70°C (-40°F to 158°F)
- Humidity: 5% to 95% relative humidity, non-condensing
- Packaged Shock (half sine): 180 m/s² (18 G), 6 ms, 600 shocks
- Packaged Vibration: 5 Hz to 62 Hz at velocity 5 mm/s, 62 Hz to 500 Hz at 0.2G
- Packaged Random Vibration: 5 Hz to 20 Hz at 1.0 ASD w/-3 dB/oct. from 20 Hz to 200 Hz
- Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

Energy Star Certified Models*

- 5520-24T / 5520-24T-BASE
- 5520-24X / 5520-24X-BASE
- 5520-24W
- 5520-48T / 5520-48T-BASE
- 5520-48SE / 5520-48SE-BASE
- 5520-48W
- 5520-12MW-36W
- 5520-24T-ACDC / 5520-24T-ACDC-BASE
- 5520-24X-ACDC / 5520-24X-ACDC-BASE
- 5520-48T-ACDC / 5520-48T-ACDC-BASE
- 5520-48SE-ACDC / 5520-48SE-ACDC-BASE



*Energy Star Models must be ordered with Air Temp sensor ESTS01

IEEE 802.3 Media Access Standards

- IEEE 802.3ab 1000BASE-T
- IEEE 802.3bz 2.5G/5GBASE-T
- IEEE 802.3bt Type4 PoE
- IEEE 802.3ae 10GBASE-X
- IEEE 802.3aq 10GBASE-LRM
- IEEE 802.3by 25GBASE-X
- IEEE 802.3ba/802.3bm 40GBASE-X and 100GBASE-X
- IEEE 802.3az Energy Efficient Ethernet

Regulatory and Safety

North American ITE

- UL 60950-1
- UL/CuL 62368-1 Listed
- Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)
- CAN/CSA 22.2 No. 60950-1

European ITE

- EN 60950-1, EN 62368-1
- EN 60825-1 Class 1 (Lasers Safety)
- 2014/35/EU Low Voltage Directive

International ITE

- CB Report and Certificate per IEC 60950-1
- IEC 62368-1

EMI/EMC Standards

North American EMC for ITE

- FCC CFR 47 Part 15 Class A (USA)
- CB Report and Certificate IEC 62368-1
- RoHS Directive 2011/65/EU
- AS/NZS 60950-1 (Australia /New Zealand)

European EMC Standards

- EN 55035
- EN 55032 Class A EN 55024
- EN 55011
- EN 61000-3-2,2014 (Harmonics)
- EN 61000-3-3 2013 (Flicker)
- EN 300 386 (EMC Telecommunications)
- 2014/30/EU EMC Directive

International EMC Certifications

- CISPR 32, Class A (International Emissions)
- AS/NZS CISPR32
- CISPR 24 Class A (International Immunity)
- IEC 61000-4-2/EN 61000-4-2 Electrostatic Discharge, 8kV Contact, 15 kV Air, Criteria B
- IEC 61000-4-3 /EN 61000-4-3 Radiated Immunity 10V/m, Criteria A
- IEC 61000-4-4/EN 61000-4-4 Transient Burst, 1 kV, Criteria AB
- IEC 61000-4-5 /EN 61000-4-5 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria B
- IEC 61000-4-6 Conducted Immunity, 0.15-80 MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11 Power Dips & Interruptions, >30%, 25 periods, Criteria C

Country Specific

- VCCI Class A (Japan Emissions)
- ACMA RCM (Australia Emissions)
- CCC Mark (China)
- KCC Mark, EMC Approval (Korea)
- EAC Mark (Custom Union)
- NRCS Mark (South Africa)
- BSMI Mark (Taiwan)
- Anatel (Brazil)
- NoM (Mexico)

Ordering Notes

Customers ordering a 5520 switch receive the base switch along with Base software license, fan modules and rack-mount kit. At least one Power Supply Unit (PSU) is required for 5520 operation, and a second PSU is required for redundancy and/or additional power.

Versatile Interface Modules (VIMs), power supplies, transceiver/optics, power cords, console cables, as well as Premier and MACsec licenses must be ordered separately.

Base Software and Optional Premier License

The Base software included with each 5520 unit supports most available switch features. Certain features, however, require a Premier license to operate. A Premier license is available in two forms – a perpetual license or included as part of an Extreme Platform ONE Standard subscription license.

For Switch Engine, a Premier License is required for:

- 5 or more OSPF interfaces
- PIM DM / PM SSM
- Anycast RP (Rendezvous Point)
- Multicast Source Discovery Protocol (MSDP)
- IS-IS/BGP4/MBGP*
- GRE Tunneling
- EthernetVPN (EVPN)
- Multi-Protocol Label Switching (MPLS)***

For Fabric Engine, a Premier License is required for:

- 5 or more OSPF or RIP interfaces
- 3 or more BGP peers
- 25 or more VRFs**
- Layer 3 Virtual Service Networks (L3 VSNs)
- Distributed Virtual Routing (DvR) Controller

* Up to 2 BGP interfaces included in Base software with the EXOS 31.4 Release

** VRFs included in Base software with the VOSS 8.4 Release

*** MPLS available with Switch Engine 31.6 release

Ordering Information

5520 Systems – Fans Included

Part Number	Product Name	Description
5520-24T	5520 24-port Switch	5520 Universal Switch with 24 x 10/100/1000BASE-T Full / Half-Duplex MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 2 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-24W	5520 24-port 90w PoE Switch	5520 Universal Switch with 24 x 10/100/1000BASE-T Full / Half-Duplex 802.3bt 90W PoE MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 3 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license.
5520-48SE	5520 48-port SFP Switch	5520 Universal Switch with 48 x 100M/1Gb SFP MACsec capable ports, includes 2 x Stacking/QSFP28 ports, 3 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-48T	5520 48-port Switch	5520 Universal Switch with 48 x 10/100/1000BASE-T Full / Half-Duplex MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 3 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-48W	5520 48-port 90w PoE Switch	5520 Universal Switch with 48 x 10/100/1000BASE-T Full / Half-Duplex 802.3bt 90W PoE MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 3 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-12MW-36W	5520 48-port 90w PoE with 12 ports multi-rate Switch	5520 Universal Switch with 12 x 100Mb/1Gb/2.5Gb/5Gb 802.3bt 90W PoE MACsec-capable ports plus 36 x 10/100/1000BASE-T 802.3bt 90W PoE Full / Half-Duplex MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 3 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-24X	5520 24-port SFP+ Switch	5520 Universal Switch with 24 x 100Mb/1Gb/10Gb SFP+ ports, includes 2 Stacking/QSFP28 ports, 2 fan modules, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license

5520 Systems – Without Fans and PSUs (ordered separately)

Part Number	Product Name	Description
5520-24T-BASE	5520 24-port Switch	5520 Universal Switch with 24 x 10/100/1000BASE-T Full / Half-Duplex MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 2 unpopulated fan slots, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-48T-BASE	5520 48-port Switch	5520 Universal Switch with 48 x 10/100/1000BASE-T Full / Half-Duplex MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 3 unpopulated fan slots, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-48SE-BASE	5520 48-port SFP Switch	5520 Universal Switch with 48 x 100M/1Gb SFP MACsec-capable ports, includes 2 x Stacking/QSFP28 ports, 3 unpopulated fan slots, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license
5520-24X-BASE	5520 24-port SFP+ Switch	5520 Universal Switch with 24 x 100Mb/1Gb/10Gb SFP+ ports, includes 2 Stacking/QSFP28 ports, 2 unpopulated fan slots, 1 VIM slot, 2 unpopulated modular PSU slots, Base software license

5520 Systems – AC/DC Switches without Fans and PSUs (ordered separately)

Part Number	Product Name	Description
5520-24T-ACDC-BASE	5520 24-port Switch	5520 Universal Switch with 24 x 10/100/1000BASE-T FDX/HDX MACsec-capable ports, 2 x Stacking/QSFP28 ports, 1 unpopulated VIM slot, 3 unpopulated modular fan slots, 2 unpopulated modular PSU slots, AC or DC PSU capable.
5520-48T-ACDC-BASE	5520 48-port Switch	5520 Universal Switch with 48 x 10/100/1000BASE-T FDX/HDX MACsec-capable ports, 2 x Stacking/QSFP28 ports, 1 unpopulated VIM slot, 3 unpopulated modular fan slots, 2 unpopulated modular PSU slots, AC or DC PSU capable.
5520-24X-ACDC-BASE	5520 24-port SFP+ Switch	5520 Universal Switch with 24 x 1Gb/10Gb SFP+ ports, 2 Stacking/QSFP28 ports, 1 unpopulated VIM slot, 3 unpopulated modular fan slots, 2 unpopulated modular PSU slots, AC or DC PSU capable.
5520-48SE-ACDC-BASE	5520 48-port SFP Switch	5520 Universal Switch with 48 x 1000BASE-X SFP MACsec capable ports, 2 x Stacking/QSFP28 ports, 1 unpopulated VIM slot, 3 unpopulated modular fan slots, 2 unpopulated modular PSU slots, AC or DC PSU capable.

Versatile Interface Modules (VIM)

Part Number	Product Name	Description
5520-VIM-4X	4-port SFP+ module	5520 Versatile Interface Module with 4 x 1/10Gb SFP+ ports
5520-VIM-4XE	4-port SFP+ module LRM/ MACsec capable	5520 Versatile Interface Module with 4 x 1/10Gb SFP+ LRM and MACsec-capable ports
5520-VIM-4YE	4-port SFP28 module MACsec capable	5520 Versatile Interface Module with 4 x 10/25Gb SFP28 MACsec-capable ports

Power Supplies for use with 5520 AC only Switches

Part Number	Product Name	Description
XN-ACPWR-350W-FB*	350W AC PSU FB	350W AC Power Supply Module – Front to Back airflow, also used on X465 and VSP 4900
XN-ACPWR-715W-FB*	715W AC PSU FB	715W AC PoE Power Supply Module – Front to Back airflow, also used on 5720, X465, and VSP 4900
XN-ACPWR-1100W-FB*	1100W AC PSU FB	1100W AC PoE Power Supply Module – Front to Back airflow, also used on 5720, X465, and VSP 4900
XN-ACPWR-2000W-FB*	2000W AC PSU FB	2000W AC PoE Power Supply Module – Front to Back airflow, also used on 5720, X465, and VSP 4900
XN-ACPWR-350W-BF	350W AC PSU BF	350W Back to Front cooling AC PSU supported on 5520 Non-PoE switches

* XN-ACPWR-xxx-FB power supply units cannot be used with legacy 10941, 10951, 10953, or XN-ACPWR-2000W-F PSUs on the same switch

Power Supplies for use with 5520-ACDC Switches

Part Number	Product Name	Description
XN-ACPWR-550W-FB	550W AC PSU FB	550W AC Power Supply Module – Front to Back airflow
XN-ACPWR-550W-BF	550W AC PSU BF	550W AC Power Supply Module – Back to Front airflow
XN-DCPWR-550W-FB	550W DC PSU FB	550W DC Power Supply Module – Front to Back airflow
XN-DCPWR-550W-BF	550W DC PSU BF	550W DC Power Supply Module – Back to Front airflow

Accessories

Part Number	Product Name	Description
17115	Spare Fan Module FB	Fan module for 5520, Front to Back airflow
17116	Spare Fan Module BF	Fan module for 5520, Back to Front airflow
ESTS01	Air Temperature Thermal Sensor	Ambient Air Temperature Sensor for Energy Star (USB)
XN-4P-RMKIT-005	4-Post Rack Mount Kit	Spare 4-Post Rack Mount Kit for 5520
XN-2P-RMKIT-005**	2-Post Rack Mount Kit	Optional 2-Post Rack Mount Kit for 5520
XN-RJ45-DB9-CONSOLE-CBL	RJ45 to DB9 Console cable	RJ45 to DB9 console cable 6ft
XN-RJ45-USBA-CONSOLE-CBL	RJ45 to USB-A Console cable	RJ45 to USB 2.0 Type A male console cable 6ft
XN-RJ45-USBC-CONSOLE-CBL	RJ45 to USB-C Console cable	RJ45 to USB-C console cable 6ft

** The optional 2-post rack mount kit can be used with 5520 chassis HW rev AD or higher.

Software Licenses

Part Number	Product Name	Description
5000-PRMR-LIC-P	Premier License for 5000 Series	Perpetual Premier License for 5000 Series switches
5000-MACSEC-LIC-P	MACsec License for the 5000 Series	Perpetual MACsec license for the 5000 Series switches

Management Platform Software Subscriptions

Extreme Networks offers a simple, inclusive subscription program with Extreme Platform ONE. For additional details on subscriptions and product tiers, please refer to the [Extreme Platform ONE data sheet](#).

Warranty

All 5520 Series models are covered under Extreme's Universal LLW policy. For warranty details, visit our [Policies and Warranties page](#).

Power Cords

Power cords are not included with the 5520 in support of our green initiatives but can be ordered separately.

Console Cables

Console cables are not included with the 5520 in support of our green initiatives but can be ordered separately.

Optics/Transceivers

For a list of the optics and transceivers supported on the 5520 Series hardware, refer to our [Extreme Optics Compatibility Tool](#).

Maintenance Services

Extreme's maintenance and support services are provided by in-house engineering experts. We have a rate of over 90% first-person resolution, ensuring efficient operation of your business-essential network.

With 24x7x365 phone support, advanced parts replacement, and on-site support, we augment your staff with expert resources to help you mitigate critical network issues fast. Visit [Extreme Maintenance Services](#) for more information.

Certifications

For information on Industry, Security, and Government certifications for 5520 Series models, contact your Sales Representative.

