

# VSP 7400 Series Switches




## Highlights

- Supports Fabric Connect and/or conventional Routed IP networking deployments
- Leverages Extreme Fabric Connect to simplify the network while helping segment traffic to meet regulatory/ security needs
- Extreme Integrated Application Hosting for third-party application hosting without impacting switch performance
- Intuitive and centralized cloud-based system management with ExtremeCloud™ IQ and ExtremeCloud IQ — Site Engine

## Key Hardware Features

- Compact 1U form factor
- Non-blocking wire-speed design
- Hot-swappable modular power supplies and fans
- AC and DC power supply options
- Front-to-back and back-to-front air flow options
- Wide range of port speeds for a range of connectivity options, from 1Gb to 100Gb

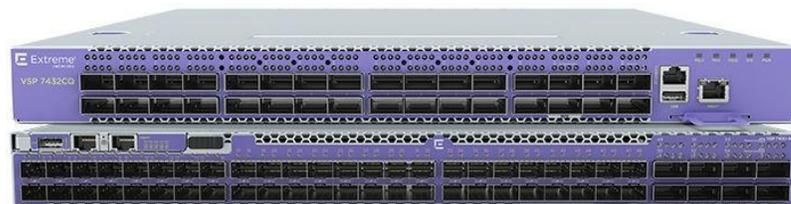

## High-Performance Fabric-Enabled Core and Aggregation Switches

The Virtual Services Platform (VSP) 7400 Series are space-efficient, high-performance core and aggregation switches that deliver wire-speed 100Gb and 25Gb Ethernet connectivity. Supporting a range of interface speeds (including 1Gb, 10Gb, 25Gb, 40Gb, and 100Gb) all in a compact 1U form factor, the VSP 7400 Series can be flexibly deployed in either core and aggregation or spine and leaf high-density, top-of-rack architectures. VSP 7400 switches support Extreme Fabric Connect for simplified, automated network services delivery, and can handle a variety of high-bandwidth applications. Available to use with the switch is a variety of QSFP28, QSFP+, SFP28, and SFP+ transceivers which support a range of fiber interface needs.

Two VSP 7400 models are available. The VSP7400-32C model is a core or spine switch with 32 100Gb QSFP28 ports, while the VSP7400-48Y-8C model is an aggregation or leaf switch with 48 25Gb SFP28 ports and eight 40Gb or 100Gb QSFP28 uplink ports.

## Extreme Fabric Connect

The VSP 7400 Series supports Extreme Fabric Connect technology. Based on an extended implementation of the Shortest Path Bridging (SPB) standards of IEEE 802.1aq, Fabric Connect offers you the ability to create a Layer 2 and Layer 3 virtualized network that simplifies network provisioning and reduces strain on network and IT teams. This allows your network to become a single cloud, as Fabric Connect instantly propagates all the end points' service attributes to every other node within your network's fabric. Fabric Connect delivers an edge-only provisioning model that seamlessly integrates with orchestration and automation, eliminates the need to configure network-wide VLANs, and removes the risk of network loops.

The VSP 7400 also natively supports Fabric Extend, a feature of Fabric Connect that extends its simplified provisioning and virtualization services over an intermediate, Layer 2 or Layer 3-based third-party network. For example, Fabric Extend allows you to connect two Fabric Connect environments or islands over a Service Provider WAN, such as MPLS or Ethernet WAN.

## Advanced Layer 3 Services

The VSP 7400 Series supports advanced Layer 3 services, including IPv4 and IPv6 dynamic routing as well as IP multicast services. This enables it to satisfy conventional IP routing deployments in addition to its fabric-based services.

VSP 7400 models support Distributed Virtual Routing (DVR) leaf services, VXLAN Gateway services, as well as IP routing technologies (such as RIPv1/2, RIPng, and OSPFv2/v3), multicast services (such as PIM-SM/SMM, IGMP v1, 2, and 3), and Fabric Connect to PIM gateway.

## Network Intelligence

The VSP 7400 Series can provide intelligent insight to your network via its native analytics capabilities, which include line-rate, hardware accelerated IPFIX, and sFlow for the analysis of traffic flow data through the switch. These tools enable VSP 7400 models to provide visibility into both your network and applications so you can make data-driven decisions without the need for expensive sensors or collectors.

## Integrated Application Hosting

VSP 7400 models support Extreme's Integrated Application Hosting which leverages the switch's hardware and software to run onboard applications without impacting switch or network performance. This enables organizations to run a Guest VM to deploy third-party or custom applications and tools for real-time visibility or to meet specific business or operational needs. This can help improve network visibility and performance while reducing operational costs.

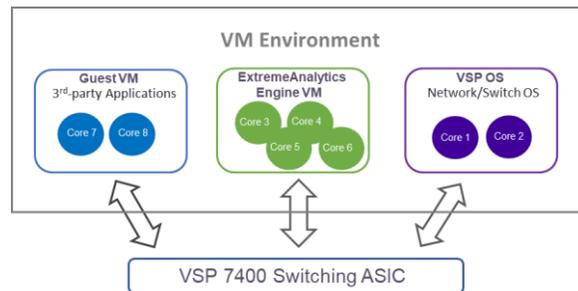


Figure 1: Extreme Integrated Application Hosting on VSP 7400 Series

## Cloud-Based Network Management

The VSP 7400 Series can be managed by ExtremeCloud IQ and ExtremeCloud IQ—Site Engine for centralized switch management, giving you a consolidated view of users, devices, and applications across wired and wireless networks. Simple on-box management functions are delivered by a web-based GUI, and a generic command-line interface (CLI) is available for manual configuration.

Zero-touch provisioning lets you quickly bring new switches online, and a granular view of devices, ports, and users enables efficient inventory and network topology management.

## Ansible Network Modules

The VSP 7400 Series is compatible with Ansible Network modules, which can be used to configure, test, and validate existing network state on the entire VSP family of devices. These modules work with your VSP 7400 switch to deliver the benefit of simple, powerful, agentless automation to your network administrators.

## Product Specifications

Model	VSP 7400-32C	VSP 7400-48Y-8C
Ports	<ul style="list-style-type: none"> <li>32 x QSFP28 10Gb/25Gb/40Gb/100Gb ports                             <ul style="list-style-type: none"> <li>Up to 32 x 40Gb/100Gb Ethernet interfaces</li> <li>Up to 124 x 10Gb/25Gb Ethernet interfaces</li> </ul> </li> <li>1 x Serial console port RJ-45</li> <li>1 x 10/100/1000BASE-T out-of-band management port</li> <li>Micro-USB Type A storage port</li> </ul>	<ul style="list-style-type: none"> <li>48 x SFP28 1Gb/10Gb/25Gb ports</li> <li>8 x QSFP28 40Gb/100Gb ports</li> <li>1 x Serial console port RJ-45</li> <li>1 x 10/100/1000BASE-T out-of-band management port</li> <li>Micro-USB Type A storage port</li> </ul>
Performance	Line Rate 6.4 Tbps Switching Capacity (3.2 Tbps ingress, 3.2 Tbps egress) / Average Latency: 800 ns / Forwarding Rate: 2,000 Mpps	Line Rate 4.0 Tbps Switching Capacity (2.0 Tbps ingress, 2.0 Tbps egress) / Average Latency: 800 ns / Forwarding Rate: 1,000 Mpps
Dimensions	44.0 cm / 57.0 cm / 4.3 cm (17.3" W / 22.4" D / 1.7" H)	44.0 cm / 53.2 cm / 4.3 cm (17.3" W / 20.9" D / 1.7" H)
Weight	7.39 kg (16.3 lb) no PSU 8.20 kg (19.9 lb) with single PSU	7.42 kg (16.4 lb) no PSU 9.07 kg (20.0 lb) with single PSU
Power Supply Options	Internal 750W AC power supply (up to 2 PSUs) Internal 750W DC power supply (up to 2 PSUs) Front-Back and Back-Front airflow options 1 + 1 redundancy	
Fan Tray	6 fan modules (5 + 1 redundancy) Front-Back and Back-Front airflow options	
CPU/Memory	8 Core Processor 16GB DDR4 ECC memory 128GB SSD memory	
Operating Conditions	0°C to 45°C (32°F to 113°F) operation 5% to 95% relative humidity, non-condensing 0 - 3000 meters altitude	

## Power Supply Specifications

Item	750W AC PSU XN-ACPWR-750W-F/R	750W DC PSU XN-DCPWR-750W-F/R
Dimensions	8.0 cm x 4.0 cm x 20.6 cm (3.15" W x 1.57" H x 8.11" D)	8.0 cm x 4.0 cm x 20.6 cm (3.15" W x 1.57" H x 8.11" D)
Weight	0.81 kg (1.79 lb)	0.85 kg (1.85 lb)
Voltage Input Range	100-127 VAC / 200-240 VAC	-40 to -75 VDC
Line Frequency Range	50 - 60 HZ	N/A
PSU Input Socket	IEC 320 C14	Terminal Block
PSU Output Cord	IEC 320 C13	N/A
Operating Conditions	0°C to 55°C (32°F to 131°F) operation	0°C to 55°C (32°F to 131°F) operation

## Power and Heat Dissipation

Switch Model	Minimum Heat Dissipation (BTU/hr) (Idle, no ports linked)	Minimum Power Consumption (W) (Idle, no ports linked)	Maximum Heat Dissipation (BTU/hr) (100% fans, 30 ports, 100% traffic)	Maximum Power Consumption (W) (100% fans, 30 ports, 100% traffic)
VSP7400-48Y-8C-AC-F VSP7400-48Y-8C-AC-R	553	167	1600	469
VSP7400-32C-AC-F VSP7400-32C-AC-R	734	215	1573	461

Note: All configurations with 2 PSUs @ 220V

## General

- VSP7400-32C
  - Physical Connectivity: 32 x QSFP28 ports
  - Switch Fabric Architecture: 6.4 Tbps total capacity (3.2 Tbps ingress, 3.2 Tbps egress)
- VSP7400-48Y-8C
  - Physical Connectivity: 48 x SFP28 ports + 8 x QSFP28 ports
  - Switch Fabric Architecture: 4.0 Tbps total capacity (2.0 Tbps ingress, 2.0 Tbps egress)

## Performance and Scale

### Layer 2

- MAC Address: up to 160,000
- Port-based VLANs: 4,059
- MSTP Instances: 64
- LACP Links per Group: 8 Active

### Layer 3

#### IPv4 Routing Services

- ARP Entries: up to 56,000
- IP Routes: up to 16,000
- RIP Interfaces: 200
- OSPF Interfaces: 512
- BGP Peers: 256
- VRF Instances: up to 256

#### IPv6 Routing Services

- Neighbors: up to 32,000
- IP Routes: up to 7,500
- RIPv6 Interfaces: 48
- OSPFv3 Interfaces: 500
- BGPv6 Peers: 256
- VRF Instances: up to 256

### Multicast

- IGMP Interfaces: 4,059
- PIM Active Interfaces: 128
- MLD Interfaces: 4,059
- IP Multicast Streams: 6,000

### Fabric Connect

- MAC Address: 80,000
- NNI Interfaces/Adjacencies: up to 256
- BEB Nodes per VSN: 2,000
- BCB/ BEB Nodes per Region: 2,000
- L2 Virtual Service Networks: 4,000
- L3 Virtual Service Networks: up to 256
- IP Shortcut Routes: IPv4 up to 16,000 and IPv6 7,500
- L2 Multicast Virtual Service Networks: 2,000
- L3 Multicast Virtual Service Networks: 256

## QoS and Filtering

- ACL non-IPv6: 512 Ingress and 254 Egress
- ACL IPv6: 384 Ingress and 256 Egress
- IPv4 ACE (Ingress): 768 each for Security and QoS (total of 1536)
- IPv4 ACE (Egress): 783
- IPv6 ACE (Ingress): 768
- IPv6 ACE (Egress): 511
- Egress Port Shaper Granularity: 1Mbps to 100Gbps per Port

## Operations and Management

- Mirrored Ports: up to 125 when all applicable ports are channelized
- sFlow: up to 3,000 samples per second
- Fabric RSPAN: up to 1,000 VSN IDs per Region

## Environmental

### Environmental Specifications

- EN/ETSI 300 019-2-1v2.1.2 - Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) - Acoustic Noise
- ASTM D3580 Random Vibration Unpackaged 1.5 G

### Environmental Compliance

- EU RoHS: 2011/65/EU
- EU WEEE: 2012/19/EU
- China RoHS: SJ/T 11363-2006
- Taiwan RoHS: CNS 15663 (2013.7)

### Packaging and Storage Specifications

- Temp: -40° C to 70° C ( -40° F to 158° F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Packaged Shock (half sine): 180m/s<sup>2</sup> (18 G), 6 ms, 600 shocks
- Packaged Vibration: 5 to 62 Hz at velocity 5 mm/s, 62 to 500 Hz at 0.2 G
- Packaged Random Vibration: 5 to 20 Hz at 1.0 ASD w/-3 dB/oct. from 20 to 200 Hz
- Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

## Regulatory and Safety

### North American ITE

- UL 60950-1
- UL 62368-1
- Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)
- CAN/ CSA 22.2 No. 60950-1
- CAN/ CSA No. 22.2 62368-1-14

### European ITE

- EN 60950-1, EN 62368-1
- EN 60825-1 Class 1 (Lasers Safety)
- 2014/35/EU Low Voltage Directive

### International ITE

- CB Report & Certificate per IEC 60950-1AS/NZS 60950-1 (Australia / New Zealand)
- IEC 62368-1
- GB 4943.1-2011
- CNS 4336-1

### EMI/EMC Standards

#### North American EMC for ITE

- FCC CFR 47 Part 15 Class A (USA)
- ICES-003 Class A (Canada)

#### European EMC Standards

- EN 55032 Class A
- EN 55024
- EN 61000-3-2,2014 (Harmonics)
- EN 61000-3-3 2013 (Flicker)
- EN 300 386 v1.6.1(EMC Telecommunications)
- 2014/30/EU EMC Directive
- EN 55011 Class A

### International EMC Certifications

- CISPR 32, Class A (International Emissions) AS/NZS CISPR32
- CISPR 24 Class A (International Immunity)
- IEC 61000-4-2 / EN 61000-4-2 Electrostatic Discharge, 8kV Contact, 15 kV Air, Criteria A
- IEC 61000-4-3 / EN 61000-4-3 Radiated Immunity 10V/m, Criteria A
- IEC 61000-4-4 / EN 61000-4-4 Transient Burst, 1kV, Criteria A
- IEC 61000-4-5 / EN 61000-4-5 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria A
- IEC 61000-4-6 Conducted Immunity, 0.15-80 MHz, 10V/m unmod. RMS, Criteria A
- IEC/EN 61000-4-11 Power Dips & Interruptions, >30%, 25 periods, Criteria C IEC 61000-4-8 / EN 61000-4-8
- CISPR 11 Class A GB/ T 9254-2008

### Country Specific

- VCCI Class A (Japan Emissions)
- ACMA RCM (Australia Emissions)
- CCC Mark (China)
- KCC Mark, EMC Approval (Korea)
- EAC Mark (Custom Union)
- NRCS / SABS Mark (South Africa)
- BSMI Mark (Taiwan)

### Telecom Standards

- CE 2.0 Compliant

# Standards Compliance

## IEEE 802.1 Bridging (Networking) and Network Management

- 802.1D MAC Bridges (a.k.a. Spanning Tree Protocol)
- 802.1p Traffic Class Expediting and Dynamic Multicast Filtering
- 802.1t
- 802.1D Maintenance
- 802.1w Rapid Reconfiguration of Spanning Tree (RSTP)
- 802.1Q Virtual Local Area Networking (VLAN)
- 802.1Qbp Equal-Cost Multi-Path (Shortest Path Bridging)
- 802.1Qcj Automatic Attachment to Provider Backbone Bridging (PBB) Services (Partial Support)
- 802.1s Multiple Spanning Trees (MSTP)
- 802.1v VLAN Classification by Protocol & Port
- 802.1ag Connectivity Fault Management
- 802.1ah Provider Backbone Bridges
- 802.1aq Shortest Path Bridging (SPB) MAC-in-MAC
- 802.1X Port-based Network Access Control
- 802.1AB-2005 Station & Media Access Control Connectivity Discovery; aka LLDP (partial support)
- 802.1AX Link Aggregation

## IEEE 802.3 Ethernet

- 802.3-1983 CSMA/CD Ethernet (ISO/IEC 8802-3)
- 802.3i-1990 10Mb/s Operation, 10BASE-T Copper
- 802.3u-1995 100Mb/s Operation, 100BASE-T Copper, with Auto-Negotiation
- 802.3x-1997 Full Duplex Operation
- 802.3z-1998 1000Mb/s Operation, implemented as 1000BASE-X (Auto-negotiation not supported)
- 802.3ab-1999 1000Mb/s Operation, 1000BASE-T Copper
- 802.3ae-2002 10Gb/s Operation, implemented as 10GBASE-SFP+ 802.3an-2006 10Gb/s Operation, 10GBASE-T Copper
- 802.3ba-2010 40Gb/s and 100Gb/s Operation
- 802.3bm-2015 40Gb/s and 100Gb/s Operation, implemented as 40GBASE-QSFP+ & 100GBASE-QSFP28

## IETF

- 768 UDP
- 783 TFTP
- 791 IP
- 792 ICMP
- 793 TCP
- 826 ARP
- 854 Telnet
- 894 Transmission of IP Datagrams over Ethernet Networks
- 896 Congestion Control in IP/TCP internetworks
- 906 Bootstrap Loading using TFTP
- 950 Internet Standard Subnetting Procedure
- 951 BOOTP: Relay Agent-only
- 959 FTP
- 1027 Using ARP to Implement Transparent Subnet Gateways
- 1058 RIP
- 1112 Host Extensions for IP Multicasting
- 1122 Requirements for Internet Hosts - Communication Layers

- 1155 Structure and Identification of Management Information for TCP/IP-based Internets
- 1156 MIB for Network Management of TCP/IP
- 1157 SNMP
- 1212 Concise MIB Definitions
- 1213 MIB for Network Management of TCP/IP-based Internets: MIB-II
- 1215 Convention for Defining Traps for use with the SNMP
- 1256 ICMP Router Discovery
- 1258 BSD Rlogin
- 1271 Remote Network Monitoring MIB
- 1305 NTPv3
- 1321 MD5 Message-Digest Algorithm
- 1340 Assigned Numbers
- 1350 TFTPv2
- 1398 Ethernet MIB
- 1442 SMIv2 of SNMPv2
- 1450 SNMPv2 MIB
- 1519 CIDR
- 1541 DHCP
- 1542 Clarifications and Extensions for BOOTP
- 1573 Evolution of the Interfaces Group of MIB-II
- 1587 OSPF NSSA Option
- 1591 DNS Client
- 1650 Definitions of Managed Objects for the Ethernet-like Interface Types
- 1657 Definitions of Managed Objects for BGP-4 using SMIv2
- 1723 RIPv2 Carrying Additional Information
- 1812 Router Requirements
- 1850 OSPFv2 MIB
- 1866 HTMLv2
- 1907 SNMPv2 MIB
- 1930 Guidelines for creation, selection, and registration of an AS 1981 Path MTU Discovery for IPv6
- 2021 Remote Network Monitoring MIBv2 using SMIv2
- 2068 HTTP
- 2080 RIPv2 for IPv6
- 2131 DHCP
- 2138 RADIUS Authentication
- 2139 RADIUS Accounting
- 2236 IGMPv2 Snooping
- 2284 PPP Extensible Authentication Protocol
- 2328 OSPFv2
- 2362 PIM-SM
- 2404 HMAC-SHA-1-96 within ESP and AH6
- 2407 Internet IP Security Domain of Interpretation for ISAKMP6 2408 Internet Security Association and Key Management Protocol
- 2428 FTP Extensions for IPv6 and NAT
- 2452 TCP IPv6 MIB
- 2453 RIPv2
- 2454 UDP IPv6 MIB
- 2460 IPv6 Basic Specification
- 2463 ICMPv6
- 2464 Transmission of IPv6 Packets over Ethernet Networks
- 2466 MIB for IPv6: ICMPv6 Group

- 2474 Differentiated Services Field Definitions in IPv4 and IPv6 Header
- 2575 VACM for SNMP
- 2576 Coexistence between v1/v2/v3 of the Internet-standard Network Management Framework
- 2578 SMIv2
- 2579 Textual Conventions for SMIv2
- 2580 Conformance Statements for SMIv2
- 2597 Assured Forwarding PHB Group
- 2598 Expedited Forwarding PHB
- 2616 HTTPv1.1
- 2710 MLD for IPv6
- 2716 PPP EAP TLS Authentication Protocol
- 2787 Definitions of Managed Objects for VRRP
- 2818 HTTP over TLS
- 2819 Remote Network Monitoring MIB
- 2863 Interfaces Group MIB
- 2865 RADIUS
- 2869 RADIUS Extensions (partial support)
- 2874 DNS Extensions for IPv6
- 2925 Definitions of Managed Objects for Remote Ping, Traceroute, and Lookup Operations
- 2933 IGMP MIB
- 2934 PIM MIB for IPv4
- 2992 ECMP Algorithm
- 3046 DHCP Relay Agent Information Option 82
- 3162 RADIUS and IPv6
- 3246 Expedited Forwarding PHB
- 3315 DHCPv6
- 3339 Date and Time on The Internet: Timestamps
- 3376 IGMPv3
- 3411 Architecture for Describing SNMP Management Frameworks 3412 Message Processing and Dispatching for SNMP
- 3413 SNMP Applications 3414 USM for SNMPv3
- 3415 VACM for SNMP
- 3416 Protocol Operations v2 for SNMP
- 3417 Transport Mappings for SNMP 3418 MIB for SNMP
- 3484 Default Address Selection for IPv6
- 3513 IPv6 Addressing Architecture
- 3569 Overview of SSM
- 3579 RADIUS Support for EAP
- 3587 IPv6 Global Unicast Address Format
- 3596 DNS Extensions to support IPv6
- 3748 Extensible Authentication Protocol
- 3810 MLDv2 for IPv6
- 3879 Deprecating Site Local Addresses
- 4007 IPv6 Scoped Address Architecture
- 4022 TCP MIB
- 4087 IP Tunnel MIB
- 4113 UDP MIB
- 4133 Entity MIB Version 3 (partial support)
- 4193 Unique Local IPv6 Unicast Addresses
- 4213 Basic Transition Mechanisms for IPv6 Hosts and Routers 4250 SSH Assigned Numbers
- 4251 SSH Protocol Architecture
- 4252 SSH Authentication Protocol
- 4253 SSH Transport Layer Protocol
- 4254 SSH Connection Protocol
- 4255 DNS to Securely Publish SSH Key Fingerprints
- 4256 Generic Message Exchange Authentication for SSH
- 4291 IPv6 Addressing Architecture
- 4292 IP Forwarding Table MIB
- 4293 IP MIB
- 4301 Security Architecture for IP\*
- 4302 IP Authentication Header\*
- 4303 IP Encapsulating Security Payload\*
- 4308 Cryptographic Suites for IPsec
- 4363 Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering and VLAN Extensions (partial support)
- 4429 Optimistic DAD for IPv6 (partial support)
- 4443 ICMP for IPv6
- 4541 Considerations for IGMP and MLD Snooping Switches
- 4552 Authentication/Confidentiality for OSPFv3
- 4601 PIM-SM: Revised Protocol Specification
- 4607 Source-Specific Multicast for IP
- 4675 RADIUS Attributes for Virtual LAN and Priority Support (partial support)
- 4835 Cryptographic Algorithm Implementation Requirements for ESP and AH
- 4861 Neighbor Discovery for IPv6
- 4862 IPv6 Stateless Address Auto-Configuration
- 5095 Deprecation of Type O Routing Headers in IPv6
- 5176 Dynamic Authorization Extensions to RADIUS
- 5187 OSPFv3 Graceful Restart (Helper-mode)
- 5308 Routing IPv6 with IS-IS
- 5340 OSPF for IPv6
- 5424 The Syslog Protocol
- 5798 VRRPv3 for IPv4 and IPv6
- 5905 NTPv4: Protocol and Algorithms Specification
- 5997 Use of Status-Server Packets in RADIUS
- 6105 IPv6 Router Advertisement Guard
- 6329 IS-IS Extensions supporting IEEE 802.1aq SPB
- 6933 Entity MIBv4 (partial support)
- 7358 VXLAN: A Framework for Overlaying Virtualized L2 Networks over L3 Networks (partial support)
- 7610 DHCPv6 Shield: Protecting against Rogue DHCPv6 Servers Internet-Draft IP/IPVPN services with IEEE 802.1aq SPB networks (draft- unbehagen-spb-ip-ipvpn-00)
- Internet-Draft SPB Deployment Considerations (draft-lapuh-spb- deployment-03)

\*Implemented to deliver IPsec capability for Control Plane traffic only.

## Ordering Notes

With all VSP 7400 systems, additional power supply, power cords, console cables, transceivers/optics and optional Premier Software Licenses must be separately ordered.

## Base Software and Optional Premier License

The VSP 7400 Series is being introduced with the VSP Operating System Software (VOSS) 8.0 release, which is the minimum required to operate the switch. Base software included with the VSP 7400 Series hardware purchase provides most of the features available on the switch. A Premium Software license, however, is required to enable the following features on the switch:

- Layer 3 Virtual Services Networks (VSNs)
- Distributed Virtual Routing Controller
- VXLAN Gateway
- 25 or more VRFs
- Extreme Insight Architecture

## Ordering Information

### VSP 7400 Series Systems

Part Number	Product Name	Description
VSP7400-32C	VSP 7432CQ	VSP 7400, 32 X 100Gbps QSFP28 ports, 8-core CPU, 16GB RAM, 128GB SSD, 4-post rack mount kit, No PSU, No Fans
VSP7400-32C-AC-F	VSP 7432CQ-F	VSP 7400, 32 X 100Gbps QSFP28 ports, 8-core CPU, 16GB RAM, 128GB SSD, Single 750W AC PSU, six fans, 4-post rack mount kit, Front to Back Airflow
VSP7400-32C-AC-R	VSP 7432CQ-R	VSP 7400, 32 X 100Gbps QSFP28 ports, 8-core CPU, 16GB RAM, 128GB SSD, Single 750W AC PSU, six fans, 4-post rack mount kit, Back to Front Airflow
VSP7400-48Y-8C	VSP7400-48Y-8C	VSP 7400, 48 X 1/10/25Gbps SFP28 ports, 8 x 100Gbps QSFP28 ports. 8-core CPU, 16GB RAM, 128GB SSD, 4-post rack mount kit, No PSU, No Fans
VSP7400-48Y-8C- AC-F	VSP7400-48Y-8C-AC-F	VSP 7400, 48 X 1/10/25Gbps SFP28 ports, 8 x 100Gbps QSFP28 ports. 8-core CPU, 16GB RAM, 128GB SSD, Single 750W AC PSU, six fans, 4-post rack mount kit, Front to Back Airflow
VSP7400-48Y-8C- AC-R	VSP7400-48Y-8C-AC-R	VSP 7400, 48 X 1/10/25Gbps SFP28 ports, 8 x 100Gbps QSFP28 ports. 8-core CPU, 16GB RAM, 128GB SSD, Single 750W AC PSU, six fans, 4-post rack mount kit, Back to Front Airflow

## Accessories

Part Number	Product Name	Description
XN-FAN-001-F	VSP/SLX Front to Back Fan	Single Fan module, Front-to-Back Airflow supported on VSP7400
XN-FAN-001-R	VSP/SLX Back to Front Fan	Single Fan module, Back-to-Front Airflow supported on VSP7400
XN-ACPWR-750W-F	VSP/SLX 750W AC PSU Front to Back airflow	AC 750W PSU, Front-to-Back Airflow supported on VSP 7400
XN-ACPWR-750W-R	VSP/SLX 750W AC PSU Back to Front airflow	AC 750W PSU, Back-to-Front Airflow supported on VSP 7400
XN-DCPWR-750W-F	VSP/SLX 750W DC PSU Front to Back airflow	DC 750W PSU, Front-to-Back Airflow supported on VSP 7400
XN-DCPWR-750W-R	VSP/SLX 750W DC PSU Back to Front airflow	DC 750W PSU, Back-to-Front Airflow supported on VSP 7400
XN-2P-RKMT299	Two Post Rail Kit VSP 7400, SLX9150	Spare two post rack mount rail kit supported on VSP 7400
XN-4P-RKMT298	Four Post Rail Kit VSP 7400, SLX9150	Spare four post rack mount rail kit supported on VSP 7400
XN-RJ45-DB9-CONSOLE-CBL	RJ45 to DB9 Console cable	RJ45 to DB9 console cable 6ft
XN-RJ45-USBA-CONSOLE-CBL	RJ45 to USBA Console cable	RJ45 to USB 2.0 Type A male console cable 6ft
XN-RJ45-USBC-CONSOLE-CBL	RJ45 to USBC Console cable	RJ45 to USB-C console cable 6ft

## Software Licenses

Part Number	Product Name	Description
VSP-PRMR-LIC-P	VSP Premier License	VSP 7400 Premier Feature License (includes Insight Architecture)

## Warranty

All 7400 Series models are covered under Extreme's Universal LLW policy. For warranty details, please visit our [Policies and Warranties page](#).

## Power Cords

In support of Extreme Networks green initiatives, power cords are not included with the 7400 but can be ordered separately. They should be specified at the time of ordering.

## Console Cables

Console cables are not included with the 7400 in support of our green initiatives but can be ordered separately.

## Optics/Transceivers

For a list of the optics and transceivers supported on the 7400 Series hardware, refer to our [Extreme Optics Compatibility Tool](#).

## Maintenance Services

Extreme's maintenance and support services are provided by in-house engineering experts. We have a rate of over 90% first-person resolution, ensuring efficient operation of your business-essential network.

With 24x7x365 phone support, advanced parts replacement, and on-site support, we augment your staff with expert resources to help you mitigate critical network issues fast.

Visit [Extreme Maintenance Services](#) for more information.

## Certifications

For information on Industry, Security, and Government certifications for 7400 Series models, contact your Sales Representative.

