


ExtremeAccess Platform 1400 Series

Highlights

- Branch device that enables secure Fabric services extension for distributed enterprises
- Extends transparent fabric services over MPLS-based WAN or internet connections
- Enables security and micro-segmentation end-to-end from central site to remote locations or branches
- Supports IPsec for secure encrypted connection over the public internet or Service Provider WAN
- Compact form factor ideal for small sites
- Two hardware models to support varying bandwidth needs
- Each model provides 6 x 1 Gigabit copper Ethernet ports, along with 2 x 10 Gigabit SFP+ fiber ports
- 1, 3, and 5-year term-based licensing model that includes software services

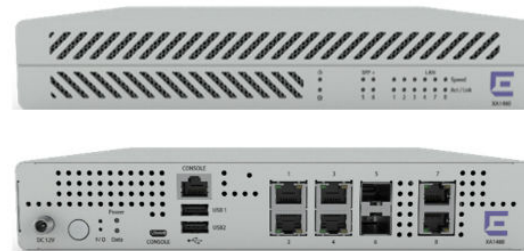

Powerful Branch Platform that Seamlessly Extends Extreme Fabric Connect Services to Remote Locations

Designed to extend the reach of Extreme Fabric Connect technology to remote sites, the ExtremeAccess™ Platform 1400 Series with Fabric Connect VPN software delivers fully featured network virtualization capabilities in a cost-effective hardware appliance. Optimized for remote locations, the ExtremeAccess Platform extends secure multi-service capabilities across either Service Provider WAN or Public Internet links in a compact form factor ideal for small sites. It offers a simplified, yet secure way to extend campus fabric services to branch locations.

The ExtremeAccess Platform 1400 Series (XA 1400) are compact general-purpose hardware appliances intended for remote site or branch deployments. Designed for use with Fabric Connect VPN (FCVPN) software, the XA 1400 enhances the value of an existing Extreme Automated Campus deployment by expanding the reach of Fabric Connect services to remote sites while delivering a consistent and uniform user experience. FCVPN software transparently extends Fabric Connect services, such as L2/L3 VSNs, over 3rd-party provider networks, including MPLS-based WANs or the Internet. In addition to secure Fabric segmentation over the WAN, FCVPN software also supports IPsec for end-to-end traffic encryption.

XA 1400 Models

Two models of the ExtremeAccess Platform 1400 Series are available: the XA 1440 and the XA 1480. Both are x86-based hardware appliances equipped with six (6) Gigabit Ethernet RJ45 copper ports and two (2) 10 Gigabit Ethernet SFP+ fiber ports. They also include serial and USB ports for management, as well as external flash use.

ExtremeAccess Platform 1440 (aka XA 1440): This model is intended for small site or branch applications in cases where up to 100 Mbps of WAN throughput is required. This model includes a 4-core Intel processor, 8Gb RAM and 32Gb Solid State Drive (SSD).

ExtremeAccess Platform 1480 (aka XA 1480): This model is intended for mid-sized branch or head-end appliance use cases where up to 500 Mbps of WAN throughput is required. This model includes an 8 core Intel processor, 8Gb RAM and 64GB Solid State Drive (SSD).

Typical Deployment Scenarios

The ExtremeAccess Platform 1400 will typically be deployed to extend secure Fabric Connect services from a head-end or campus location to a remote site. Connection can be over a Service Provider WAN or public internet using either Fabric Extend or IPsec encrypted tunnels. In either case, Fabric Connect services can be securely extended to the remote location. The following sections provide typical deployment scenarios.

Scenario: Fabric Services Over Service Provider WANs with Fabric Extend

In this scenario, remote sites with ExtremeAccess Platform 1400 appliances are connected over a Service Provider WAN (e.g., MPLS, Ethernet, or DSL) to the central campus or head-end site (see Figure 1). Because the Service Provider WAN is private and generally has its own built-in security, IPsec encryption is not required. Here, VSP 7000 or 8000 Series switches in the central site can act as the aggregation devices for Fabric Extend tunnels to the ExtremeAccess Platform 1400 appliances in the remote sites. In this scenario, secure Fabric Connect services (or segments) are run across Fabric Extend tunnels using a VXLAN overlay.

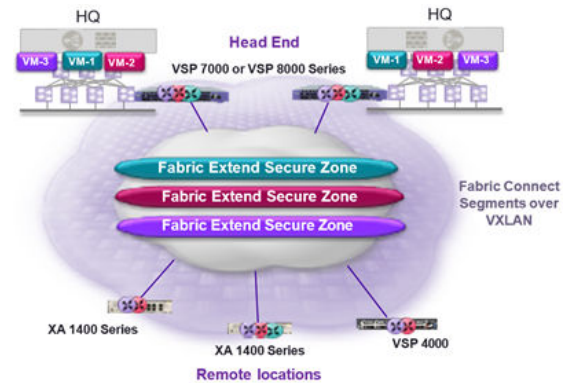


Figure 1: Secure Fabric Services over a Service Provider WAN using Fabric Extend

Scenario: Fabric Services Over the Public Internet with IPSec

In this scenario, remote sites with Extreme Access Platform 1400 appliances connect over the public internet to the central campus or head-end site. Because the internet is less secure than a Service Provider WAN, IPSec encryption on the ExtremeAccess Platform 1400 can be used to ensure a secure link. Here, ExtremeAccess Platform 1400 appliances would be deployed in both Campus (or head-end) and remote sites to perform IPSec encryption, as well as any needed fragmentation and reassembly. Secure Fabric Connect services (or segments) can then be run across the IPSec tunnels across the public internet.

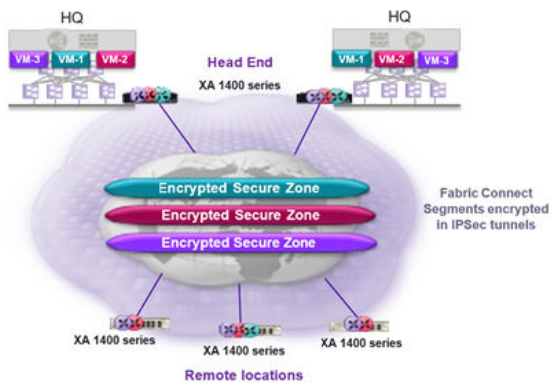


Figure 2: Secure Fabric Services over the Public Internet using IPSec encryption

Advanced Layer 3 Services

The ExtremeAccess Platform 1400 with Fabric Connect VPN software also supports Layer 3 services. This enables it to address IP routing requirements, in addition to its fabric-based services. Layer 3 services include IPv4 dynamic and static routing, as well as Border Gateway Protocol with support for RIPV1/2, OSPFv2, BGPv4, and VRF.

Management

The ExtremeAccess Platform 1400 Series can be managed in a variety of ways. Simple on-box management functions are delivered by a web-based GUI and a generic CLI is available for manual configuration. Centralized management can be done via ExtremeCloud IQ - Site Engine which provides a comprehensive unified management capability.

Fabric Connect VPN Software

When enabled with Fabric Connect VPN software, the ExtremeAccess Platform 1400 Series supports full-feature Extreme Fabric Connect capabilities. Based on an extended implementation of the Shortest Path Bridging (SPB) standards of IEEE 802.1aq and IETF RFC 6329, Fabric Connect offers a virtualized network that simplifies network provisioning and reduces the strain on network and IT personnel. Benefits include:

- Eliminates the need to configure network-wide VLANs
- Replaces legacy protocols with a single unified protocol
- Removes the risk of network loops
- Delivers an edge-only provisioning model that seamlessly integrates with orchestration and automation
- Supports both L2 and L3 virtualization

Specific Fabric Connect features supported on the ExtremeAccess Platform with the Fabric Connect VPN software include: L2 Virtual Service Networks (VSNs), Layer 3 Virtual Service Networks, Inter-VSN Routing, IPv4 Shortcuts, and Fabric Extend Tunneling.

Specifications

External Ports and Slots

Model	Ports/Slots
XA1440	6 x 10/100/1000BASE-T ports (RJ-45) <ul style="list-style-type: none">• Full/Half-Duplex at 10/100Mb on Ports 1-4• Full Duplex only on Ports 7-8 and at 1Gb on Ports 1-4 2 x 1/10Gb SFP+ ports 1 x Serial (console port RJ-45) 1 x USB Micro-B management port 2 x USB A ports for external USB flash
XA1480	6 x 10/100/1000BASE-T ports (RJ-45) <ul style="list-style-type: none">• Full/Half-Duplex at 10/100Mb on Ports 1-4• Full Duplex only on Ports 7-8 and at 1Gb on Ports 1-4 2 x 1/10Gb SFP+ ports 1 x Serial (console port RJ-45) 1 x USB Micro-B management port 2 x USB A ports for external USB flash

Weights and Dimensions

Part Number	Weight	Physical Dimensions
XA1440	1.7 kg (3.75lb)	250 mm W/44 mm H/252 mm D 9.84in W/1.73 in H/9.92 in D
XA1480	1.7 kg (3.75lb)	250 mm W/44 mm H/252 mm D 9.84in W/1.73 in H/9.92 in D

Power Specifications - XA1440/XA1480

Voltage Input Range (nominal)	90-264 VAC
Line Frequency Range	47 to 63 Hz
Power Cord Input Plug	IEC/EN 60320 C13

Minimum/Maximum Power Consumption and Heat Dissipation

Switch Model	Minimum Heat Dissipation (BTU/hr)	Minimum Power Consumption (W)	Maximum Heat Dissipation (BTU/hr)	Maximum Power Consumption (W)
XA1440	23	6.7	64	18.6
XA1480	54	15.7	95	27.6

General

CPU/Memory

XA1440

- 4 Core Denverton CPU
- 8GB RAM
- 32GB SSD

XA1480

- 8 Core Denverton CPU
- 8GB RAM
- 64GB SSD

Performance and Scale

Layer 2

- MAC Address: 2000 in XA1440, 4000 in XA1480
- Port-based VLANs: 500

- MSTP Instances: 12
- LACP Links per Group: 8 Active

Layer 3 IPv4 Routing Services

- ARP Entries: 2000 in XAI440, 4000 in XAI480
- IP Routes: up to 15,488
- RIP Interfaces: 200
- OSPF Interfaces: 48
- BGP Peers: 12
- VRF Instances: 24 (including GRT)

Fabric Connect

- NNI Interfaces/Adjacencies: 255
- BCB/BEB Nodes per Region: 550
- L2 Virtual Service Networks (L2 VSNs): 124
- L3 Virtual Service Networks (L3 VSNs): 24 (including IP shortcuts)
- Fabric Extend Tunnels: 255
- Fabric Extend with IPsec: 64

QoS and Filtering

- IPv4 ACE: 500 Ingress and 500 Egress
- QoS priority queues: 8

Operations and Management

- Mirrored Ports: 7

Environmental

Environmental Specifications

- EN/ETSI 300 019-2-1 v2.1.2 - Class 1.2 Storage
- EN/ETSI 300 019-2-2 v2.1.2 - Class 2.3 Transportation
- EN/ETSI 300 019-2-3 v2.1.2 - Class 3.1e Operational
- EN/ETSI 300 753 (1997-10) - Acoustic Noise
- ASTM D3580 Random Vibration Unpackaged 1.5G

Environmental Compliance

- EU RoHS 2011/65/EU (EU) 2015/863
- EU WEEE 2012/19/EU
- EU REACH EC No 1907/2006
- China RoHS SJ/T 11363-2014
- Taiwan RoHS CNS 15663 (2013.7)

Operating Conditions

- Temp: 0°C to 40°C (32°F to 104°F)
- Humidity: 10% to 90% relative humidity, non-condensing
- Altitude: 0 to 2,000 meters (6,566 feet)

Packaging and Storage Specifications

- Temp: -40°C to 70°C (-40°F to 158°F)
- Humidity: 10% to 95% relative humidity, non-condensing
- Packaged Shock (half sine): 180 m/s² (18 G), 6 ms, 600 shocks
- Packaged Vibration: 5 to 62 Hz at velocity 5 mm/s, 62 to 500 Hz at 0.2 G

- Packaged Random Vibration: 5 to 20 Hz at 1.0 ASD w/-3 dB/oct. from 20 to 200 Hz
- Packaged Drop Height: 14 drops minimum on sides and corners at 42 inches (<15 kg box)

Regulatory and Safety

North American ITE

- UL 60950-1
- UL 62368-1
- Complies with FCC 21CFR 1040.10 (U.S. Laser Safety)
- CDRH Letter of Approval (US FDA Approval)
- CAN/CSA 22.2 No. 60950-1-07
- CAN/CSA No. 22.2 62368-1-14

European ITE

- EN 60950-1, EN 62368-1
- EN 60825-1 Class 1 (Lasers Safety)
- 2014/35/EU Low Voltage Directive

International ITE

- CB Report & Certificate per IEC 60950-1 & IEC 62368-1
- AS/NZS 60950-1 (Australia/New Zealand)
- IEC 62368-1
- GB 4943.1-2011
- CNS 14336-1

EMI/EMC Standards

North American EMC for ITE

- FCC CFR 47 part 15 Class A (USA)
- ICES-003 Class A (Canada)

European EMC Standards

- EN 55032 Class A
- EN 55024
- EN 61000-3-2,2014 (Harmonics)
- EN 61000-3-3 2013 (Flicker)
- EN 300 386 v1.6.1 (EMC Telecommunications)
- 2014/30/EU EMC Directive
- EN 55011 Class A

International EMC Certifications

- CISPR 32, Class A (International Emissions)
- AS/NZS CISPR32
- CISPR 24 Class A (International Immunity)
- IEC 61000-4-2/EN 61000-4-2 Electrostatic Discharge, 4kV Contact, 8 kV Air, Criteria A
- IEC 61000-4-3/EN 61000-4-3 Radiated Immunity 10V/m, Criteria A
- IEC 61000-4-4/EN 61000-4-4 Transient Burst, 1 kV, Criteria A
- IEC 61000-4-5/EN 61000-4-5 Surge, 2 kV L-L, 2 kV L-G, Level 3, Criteria A
- IEC 61000-4-6 Conducted Immunity, 0.15-80 MHz, 3V/m unmod. RMS, Criteria A

- IEC/EN 61000-4-11 Power Dips & Interruptions, >30%, 25 periods, Criteria C
- IEC 61000-4-8/EN 61000-4-8
- CISPR 11 Class A
- GB/T 9254-2008

- CCC Mark (China)
- KCC Mark, EMC Approval (Korea)
- EAC Mark (Custom Union)
- NRCS/SABS (South Africa)
- BSMI Mark (Taiwan)
- Anatel Mark (Brazil)

Country Specific

- VCCI Class A (Japan Emissions)
- ACMA RCM (Australia Emissions)

Telecom Standards

- CE 2.0 Compliant

IEEE 802.3 Media Access Standards

- IEEE 802.3ab 1000BASE-T
- IEEE 802.3ae 10GBASE-X

Ordering Information

ExtremeAccess Platform Hardware

Part Number	Product Name	Product Description
XA1440	ExtremeAccess Platform 1440	ExtremeAccess Platform 1440 hardware appliance with 6 x 10/100/1000Mbps Base-T ports and 2 x 1/10GbSFP+ ports, includes Fan and one 12V external power adapter. Power Cord ordered separately
XA1480	ExtremeAccess Platform 1480	ExtremeAccess Platform 1480 hardware appliance with 6 x 10/100/1000Mbps Base-T ports and 2 x 1/10GbSFP+ ports, includes Fan and one 12V external power adapter. Power Cord ordered separately
XN-2P-RMKIT-XA	Two Post Rack Mount kit for XA 1400	Optional two post rack mount kit for ExtremeAccess Platform 1400 models. Includes brackets for front mount of chassis in a two-post rack.
XA1400-PWR-ADPT	12V/60W External Power Adapter for XA 1400	Spare 12V/60W External Power Adapter for ExtremeAccess Platform 1400 models

ExtremeAccess Software Options

Part Number	Product Name	Product Description
FCVPN100-EW-1YR	FCVPN 100Mb RTU App Lic and EW TAC 1YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 1YR Right-to-Use (RTU) term license - includes ExtremeWorks Support (24x7x365 TAC and eSupport)
FCVPN100-PW-1YR	FCVPN 100Mb RTU App Lic and PW TAC 1YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 1YR Right-to-Use (RTU) term license - includes PartnerWorks Plus Support (24x7x365 TAC and eSupport)
FCVPN100-EWP-1YR	FCVPN 100M RTU App Lic and EWP TAC 1YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 1YR Right-to-Use (RTU) term license - includes ExtremeWorks Premier Support (24x7x365 TAC and eSupport)
FCVPN100-EW-3YR	FCVPN 100M RTU App Lic and EW TAC 3YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 3YR Right-to-Use (RTU) term license - includes ExtremeWorks Support (24x7x365 TAC and eSupport)
FCVPN100-PW-3YR	FCVPN 100M RTU App Lic and PW TAC 3YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 3YR Right-to-Use (RTU) term license - includes PartnerWorks Plus Support (24x7x365 TAC and eSupport)
FCVPN100-EWP-3YR	FCVPN 100M RTU App Lic and EWP TAC 3YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 3YR Right-to-Use (RTU) term license - includes ExtremeWorks Premier Support (24x7x365 TAC and eSupport)
FCVPN100-EW-5YR	FCVPN 100M RTU App Lic and EW TAC 5YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 5YR Right-to-Use (RTU) term license - includes ExtremeWorks Support (24x7x365 TAC and eSupport)

Part Number	Product Name	Product Description
FCVPN100-PW-5YR	FCVPN 100M RTU App Lic and PW TAC 5YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 5YR Right-to-Use (RTU) term license - includes PartnerWorks Plus Support (24x7x365 TAC and eSupport)
FCVPN100-EWP-5YR	FCVPN 100M RTU App Lic and EWP TAC 5YR	Fabric Connect VPN App at 100Mbps Bandwidth Tier, 5YR Right-to-Use (RTU) term license - includes ExtremeWorks Premier Support (24x7x365 TAC and eSupport)
FCVPN500-EW-1YR	FCVPN 500M RTU App Lic and EW TAC 1YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 1YR Right-to-Use (RTU) term license - includes ExtremeWorks Support (24x7x365 TAC and eSupport)
FCVPN500-PW-1YR	FCVPN 500M RTU App Lic and PW TAC 1YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 1YR Right-to-Use (RTU) term license - includes PartnerWorks Plus Support (24x7x365 TAC and eSupport)
FCVPN500-EWP-1YR	FCVPN 500M RTU App Lic and EWP TAC 1YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 1YR Right-to-Use (RTU) term license - includes ExtremeWorks Premier Support (24x7x365 TAC and eSupport)
FCVPN500-EW-3YR	FCVPN 500M RTU App Lic and EW TAC 3YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 3YR Right-to-Use (RTU) term license - includes ExtremeWorks Support (24x7x365 TAC and eSupport)
FCVPN500-PW-3YR	FCVPN500M RTU App Lic and PW TAC 3YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 3YR Right-to-Use (RTU) term license - includes PartnerWorks Plus Support (24x7x365 TAC and eSupport)
FCVPN500-EWP-3YR	FCVPN500M RTU App Lic and EWP TAC 3YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 3YR Right-to-Use (RTU) term license - includes ExtremeWorks Premier Support (24x7x365 TAC and eSupport)
FCVPN500-EW-5YR	FCVPN500M RTU App Lic and EW TAC 5YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 5YR Right-to-Use (RTU) term license - includes ExtremeWorks Support (24x7x365 TAC and eSupport)
FCVPN500-PW-5YR	FCVPN 500M RTU App Lic and PW TAC 5YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 5YR Right-to-Use (RTU) term license - includes PartnerWorks Plus Support (24x7x365 TAC and eSupport)
FCVPN500-EWP-5YR	FCVPN 500M RTU App Lic and EWP TAC 5YR	Fabric Connect VPN App at 500Mbps Bandwidth Tier, 5YR Right-to-Use (RTU) term license - includes ExtremeWorks Premier Support (24x7x365 TAC and eSupport)

10Gb Optical Transceivers

Part Number	Product Name	Product Description
10301 or AA1403015-E6	10Gb SR SFP+ module	10GBASE-SRSFP+, 850 nm, LC, 300m OM3 MMF, 400m OM4 MMF
10302	10Gb LR SFP+ module	10GBASE-LRSFP+, 1310 nm, LC, 10 km SMF
AA1403011-E6HT	10Gb LR SFP+ module, HT	10GBASE-LRSFP+, 1310 nm, LC, 10 km SMF, up to 85C
AA1403015-E6HT	10Gb SR SFP+ module, HT	10GBASE-SRSFP+, 850 nm, LC, 300m OM3 MMF, 400m OM4 MMF, up to 85C
AA1403019-E6	10Gb Direct Attach Cable, 3m	Direct Attach Cable (SFP+), 3m passive copper
AA1403020-E6	10Gb Direct Attach Cable, 5m	Direct Attach Cable (SFP+), 5m passive copper
AA1403022-E6	10Gb Direct Attach Cable, 7m	Direct Attach Cable (SFP+), 7m passive copper
AA1403018-E6	10Gb Direct Attach Cable, 10m	Direct Attach Cable (SFP+), 10m passive copper
10304	10GBASE-CRSFP 1m	10BASE-CRSFP+ pre-terminated twin-ax copper cable with link length of 1m
10305	10GBASE-CRSFP 3m	10BASE-CRSFP+ pre-terminated twin-ax copper cable with link length of 3m

Part Number	Product Name	Product Description
10306	10GBASE-CRSFP 5m	10BASE-CRSFP+ pre-terminated twin-ax copper cable with link length of 5m
10307	10GBASE-CRSFP 10m	10BASE-CRSFP+ pre-terminated twin-ax copper cable with link length of 10m

1Gb Optical Transceivers

Part Number	Product Name	Product Description
AA1419048-E6	SFP 1000BASE-SX DDI (LC)	1000BASE-SX Small Form Factor Pluggable (SFFP) connector type: LC
AA1419049-E6	SFP 1000BASE-LX DDI (LC)	1000BASE-LX Small Form Factor Pluggable (SFFP) connector type: LC
10051H	100BASE-SXSFP, Hi	1000BASE-SX SFP, MMF 220 & 550 meters, LC connector, Industrial Temp
10052H	100BASE-LXSFP, Hi	1000BASE-LX SFP, MMF 220 & 550 meters, SMF 10km, Industrial Temp
10053H	100BASE-ZX SFP, Hi	1000BASE-ZX SFP, SMF 70km, Industrial Temp

Software and Licensing

Fabric Connect VPN (FCVPN) software hosted on the ExtremeAccess Platform 1400 is offered as a “term-based” (or subscription) license and is available in 1-year, 3-year and 5-year terms. Each FCVPN license consists of:

1. Right-to-Use license for the purchased term
2. Software Services with GTAC support for the purchased term.

FCVPN Software Services are further available in three (3) service tiers, including ExtremeWorks (EW), PartnerWorks (PW) and ExtremeWorks Premier (EWP) options.

The FCVPN license is also available in two (2) bandwidth tiers to address varying WAN throughput needs:

1. 100 Mbps tier – available on both ExtremeAccess Platform 1440 and 1480 models
2. 500 Mbps tier – available only on ExtremeAccess Platform 1480 model

WAN bandwidth refers to the aggregate WAN throughput on the specific ExtremeAccess Platform hardware appliance.

Ordering Notes

A Fabric Connect VPN (FCVPN) license is a mandatory attach for each ExtremeAccess Platform 1400 hardware appliance. The ExtremeAccess

Platform appliance itself includes the base system along with external 12V/60W power adapter and fan. Power cords and transceiver/optics are not included and must be ordered separately.

Power Cords

ExtremeAccess Platform 1400 power cords can be ordered separately but need to be specified at time of ordering.

Warranty

The ExtremeAccess Platform hardware is covered under Extreme's 1-year warranty policy. For details, visit <http://extremenetworks.com/support/policies/>. Note that the warranty is for the hardware only. Software services are bundled and provided as part of the Fabric Connect VPN (FCVPN) order code.

Maintenance Services

Extreme's maintenance and support services with 100% in-sourced engineering experts and over 90% first-person resolution ensure efficient operations of your business- essential network. 24x7x365 phone support, advanced part replacement, and on-site support augment your staff with experienced resources that help you mitigate critical network issues fast. Visit [Extreme Maintenance Services](#) for more information.



©2023 Extreme Networks, Inc. All rights reserved. Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries. All other names are the property of their respective owners. For additional information on Extreme Networks Trademarks please see <http://www.extremenetworks.com/company/legal/trademarks>. Specifications and product availability are subject to change without notice. 28jul23